
EXCEPT AS OTHERWISE PROVIDED BY CONTRACT, THIS DRAWING AND SPECIFICATIONS SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF MATTER DEPICTED HEREIN WITHOUT THE EXPRESSED WRITTEN PERMISSION OF THE LAKOS CORPORATION, OR ITS ASSIGNEES.


THIS DRAWING HAS BEEN GENERATED AND IS MAINTAINED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY AN APPROVED ENGINEERING CHANGE ORDER (ECO).
PAPER COPIES ARE UNCONTROLLED.

REVISION HISTORY				
ECN/ECR	REV	DESCRIPTION	DATE	APPROVED
ECN-0101	F	UPDATED TO INTERNAL VORTUBE	10/17/2025 3/18/2026	MA CG


NOTES:

1. INLET & OUTLET FLANGES ARE 4" 150# RF PER ANSI B16.5 REQUIRING 8X ∅5/8" BOLTS (BOLTS AND GASKETS NOT INCLUDED).
2. MAXIMUM PRESSURE: 150 psi (10.3 bar).
3. MAXIMUM TEMPERATURE: 180°F (82.2°C).
4. PRESSURE LOSS: 3-12 psid (.2-.8 bar) AT RATED FLOW.
5. RATED FLOW: 200-325 gpm (45-74 m³/hr).
6. APPROXIMATE DRY WEIGHT: 472 lbs (214 kg).
7. FINISH: LAKOS BLUE (EXTERIOR ONLY).

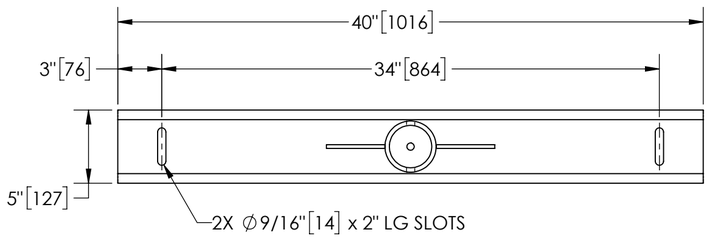


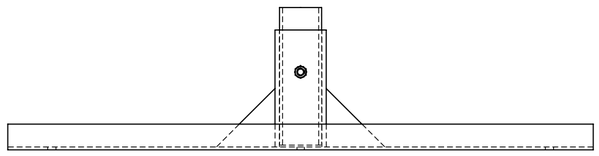


SECTION B-B

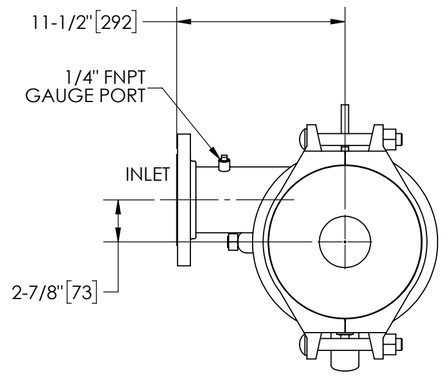

SECTION A-A

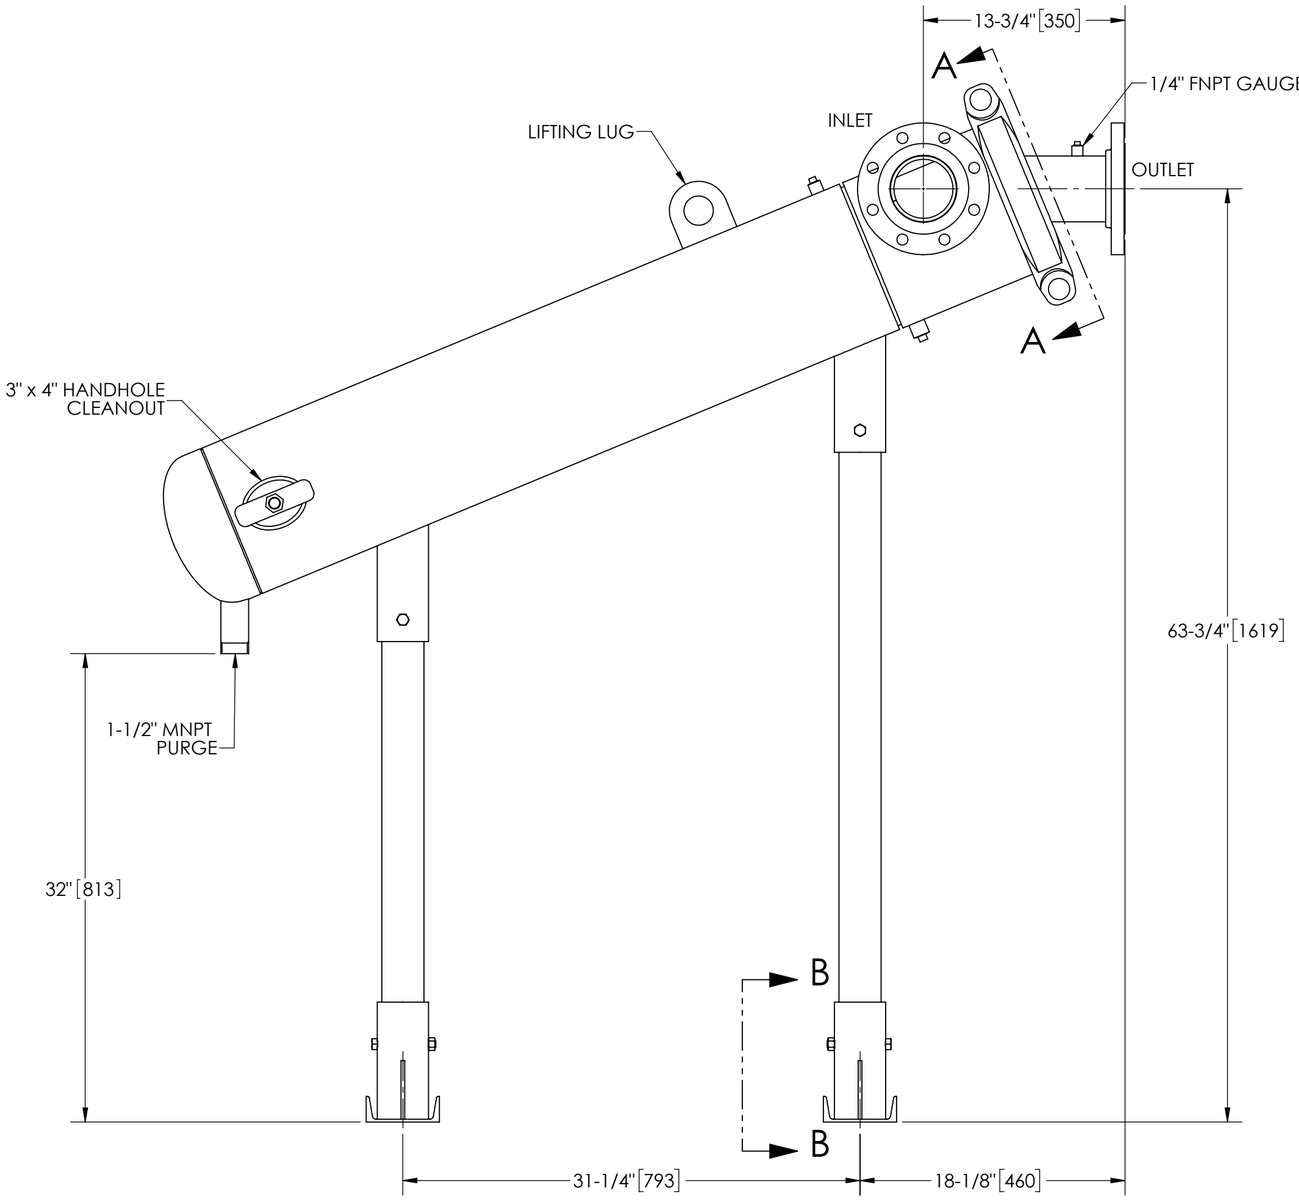

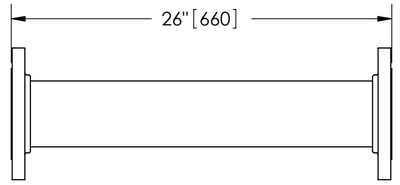

FLANGED SPOOL
MODEL FS-04 (AVAILABLE SEPARATELY)
REQUIRED FOR REMOVAL OF TOP ASSEMBLY

SUBMITTAL DRAWING

This drawing is submitted for spatial consideration only. Do not pre-plumb to these dimensions.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN: INCHES [mm]
TOLERANCES ARE:
FRACTIONS ± 1/2" DECIMALS .XX ± .01 .XXX ± .005 .XXXX ± .0005 ANGLES ± 1/4°
DO NOT SCALE DRAWING
MATERIAL CLASS P-1 MILD CARBON STEEL
FINISH LAKOS BLUE

ENGINEERED FOR: FLANGED

APPROVALS	DATE
DRAWN DLW	4/3/06
ENGR DLW	4/3/06
MFG -	-
WORK ORDER	QTY.

LAKOS FILTRATION SOLUTIONS® FRESNO, CALIFORNIA WWW.LAKOS.COM

TITLE: JPX-0200-L/FLG, SEPARATOR, 200-325 gpm, CARBON STEEL

SIZE C | MODEL NO. | DWG NO. 119620 | REV. F
SCALE 1:8 | EST. WT. 472 lb | SHEET 1 OF 1

DWG NO. 119620 SH 1 REV. F

GEDO
Distribution et conseil : GEDO FRANCE
04 85 88 02 75 | separateur@gedo.fr | separateurs.gedo.fr
565 avenue du Prado - 13008 Marseille - France