
EXCEPT AS OTHERWISE PROVIDED BY CONTRACT, THIS DRAWING AND SPECIFICATIONS SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF MATTER DEPICTED HEREIN WITHOUT THE EXPRESSED WRITTEN PERMISSION OF THE CLAUDE LAVAL CORPORATION, OR ITS ASSIGNEES.


NOTES:

1. INLET & OUTLET FLANGES ARE 4" 150# RF PER ANSI B16.5 REQUIRING 8X Ø5/8" BOLTS (BOLTS AND GASKETS NOT INCLUDED)
2. MAXIMUM PRESSURE: 250 psi (17.24 bar).
3. MAXIMUM TEMPERATURE: 230°F (110°C).
4. PRESSURE LOSS: 5-18 psid (0.34-1.24 bar) AT RATED FLOW.
5. RATED FLOW: 195-350 gpm (44.3-79.5 m³/hr).
6. APPROXIMATE DRY WEIGHT: 584 lb (265 kg).
7. FINISH: LAKOS BLUE (EXTERIOR ONLY).

THIS DRAWING HAS BEEN GENERATED AND IS MAINTAINED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY AN APPROVED ENGINEERING CHANGE ORDER (ECO).
PAPER COPIES ARE UNCONTROLLED.


REVISION HISTORY				
ZONE	REV	DESCRIPTION	DATE	APPROVED

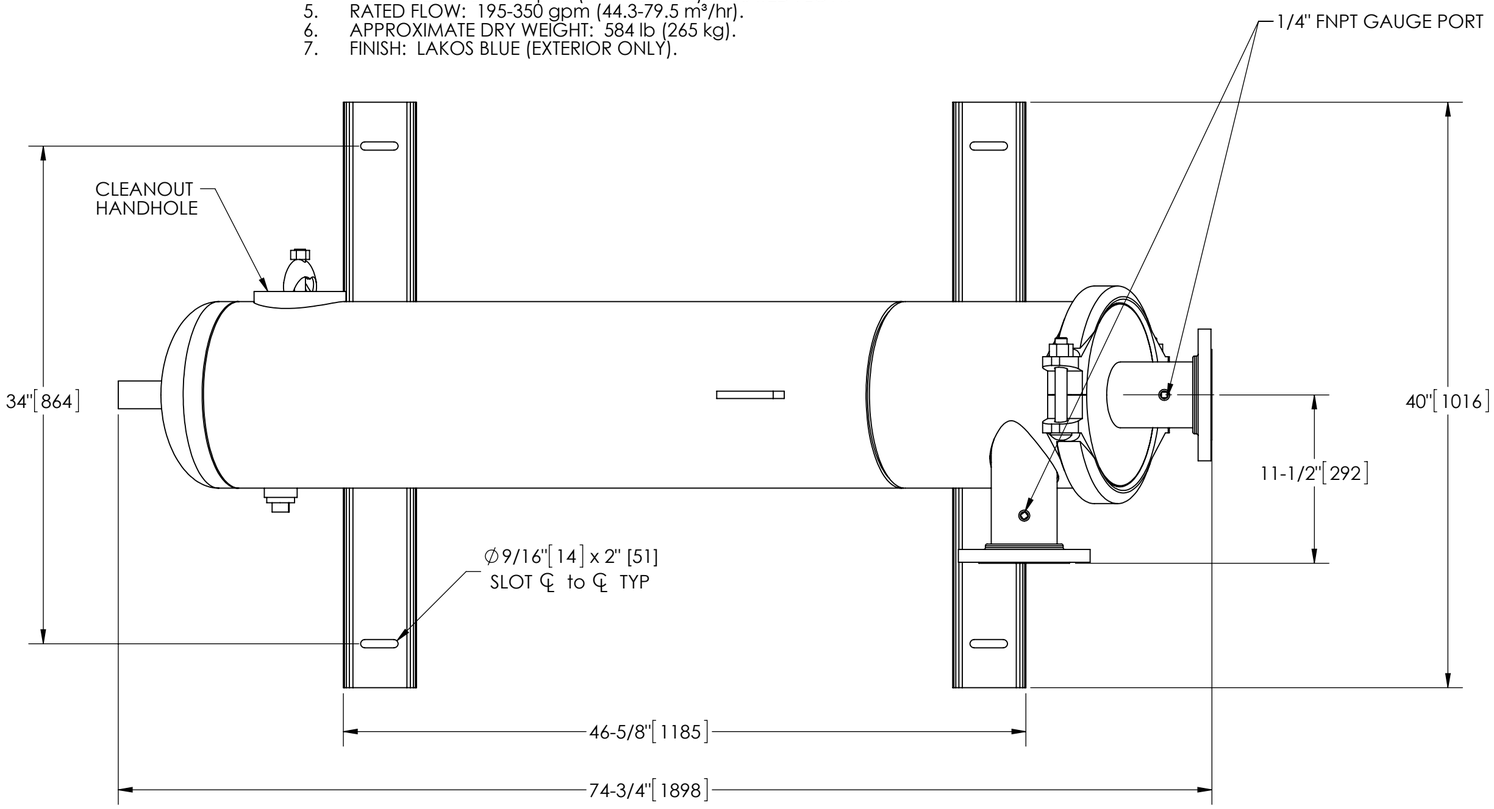

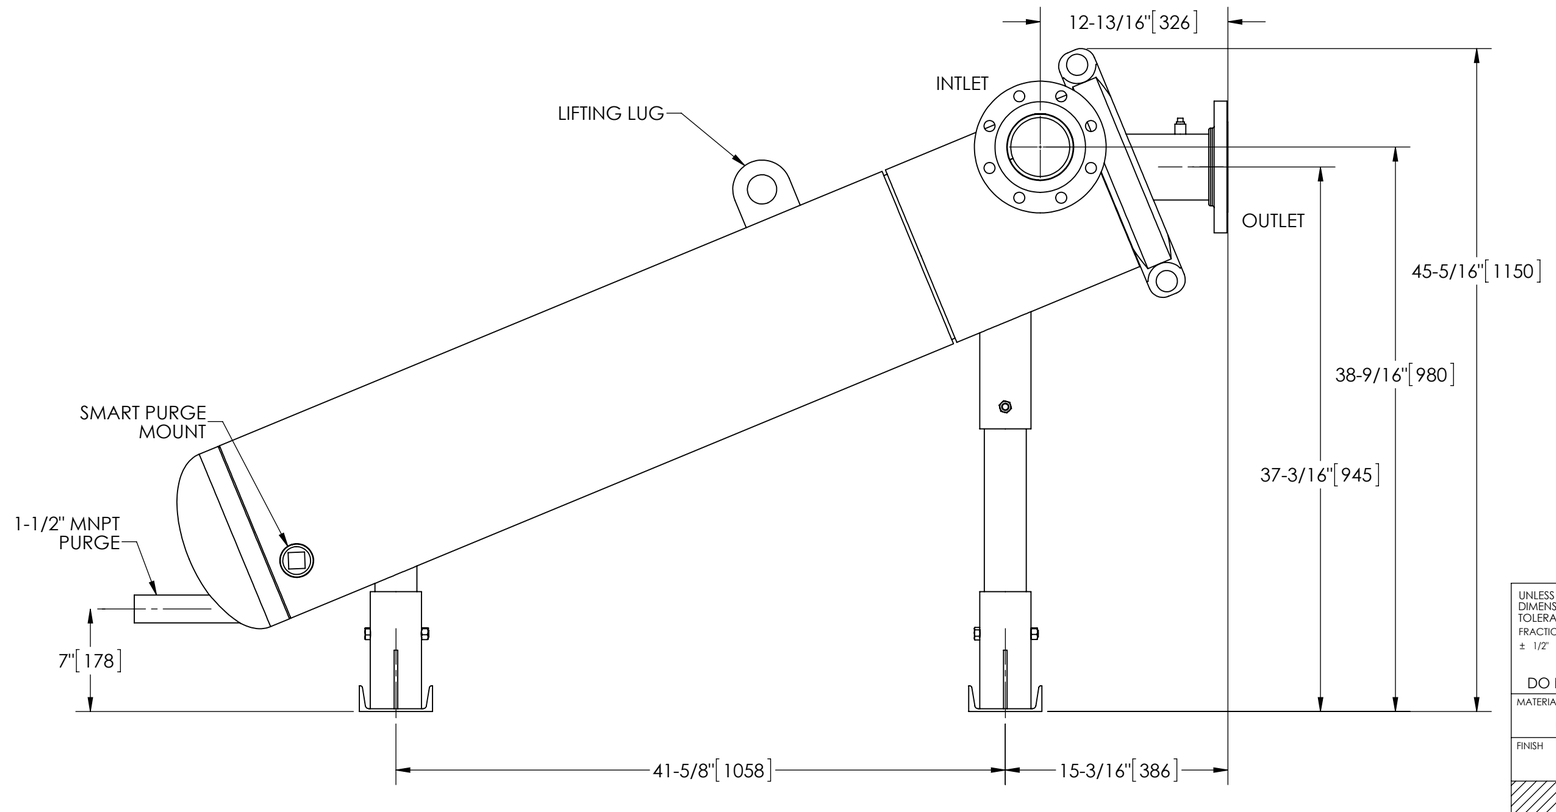


SUBMITTAL DRAWING

This drawing is submitted for spatial consideration only. Do not pre-plumb to these dimensions.

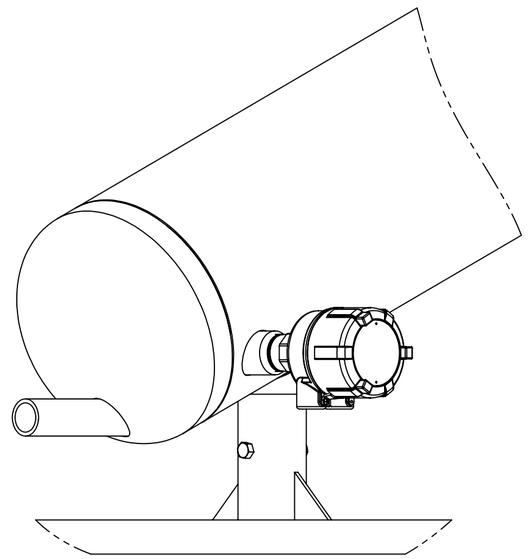

OPTIONAL SMART PURGE

UNIT SHOWN WITH OPTIONAL SMART PURGE SENSOR ASSEMBLY INSTALLED (ORDER SEPARATELY)

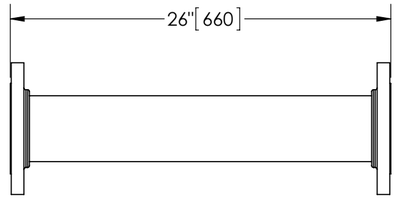

OPTIONAL FLANGED SPOOL

MODEL FS-04 (AVAILABLE SEPARATELY)
REQUIRED FOR REMOVAL OF TOP ASSEMBLY

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN: INCHES [mm] TOLERANCES ARE: FRACTIONS ± 1/2" DECIMALS .XX ± .01 .XXX ± .005 .XXXX ± .0005 ANGLES ± 1/4° DO NOT SCALE DRAWING	ENGINEERED FOR: STANDARD	LAKOS® CLAUDE LAVAL CORP. FRESNO, CALIFORNIA 93727 WWW.LAKOS.COM	
MATERIAL CLASS P-1 MILD CARBON STEEL	APPROVALS / DRAWN Cag	DATE 10/1/14	TITLE eJPX-0195-L, SEPARATOR 0195 eJPX LOW PRO, CARBON STEEL
FINISH LAKOS BLUE	ENGR		SIZE C · MODEL NO. · DWG NO. 137164 · REV. 01
	MFG		SCALE 1:8 · EST. WT. 584 lb · SHEET 1 OF 1
	WORK ORDER	QTY.	

DWG NO. 137164 SH 1 REV. 01

Distribution et conseil : GEDO FRANCE
04 85 88 02 75 | separateur@gedo.fr | separateurs.gedo.fr
565 avenue du Prado - 13008 Marseille - France