

EXCEPT AS OTHERWISE PROVIDED BY CONTRACT, THIS DRAWING AND SPECIFICATIONS SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF MATTER DEPICTED HEREIN WITHOUT THE EXPRESSED WRITTEN PERMISSION OF THE LAKOS CORPORATION, OR ITS ASSIGNEES.

REVISIONS				
ECN	REV.	DESCRIPTION	DATE	APPROVED
	A	RELEASE FOR MANUFACTURING	5/31/2022	TRR


NOTES:

1. INLET & OUTLET FLANGES ARE 4" 150# RF PER ANSI B16.5 REQUIRING 8X ∅5/8" BOLTS (BOLTS AND GASKETS NOT INCLUDED).
2. MAXIMUM PRESSURE: 150 psi (10.3 bar).
3. MAXIMUM TEMPERATURE: 180°F (82°C).
4. PRESSURE LOSS: 3-15 psid (.21-1.03 bar) AT RATED FLOW.
5. RATED FLOW: 240-540 gpm (55-123 m³/hr).
6. APPROXIMATE DRY WEIGHT: 556 lbs (252 kg).
7. FINISH: POWDERCOAT LAKOS MEDIUM GRAY RAL-7005 (EXTERIOR ONLY).
8. CERTIFIED UNDER NSF/ANSI STANDARD NSF-61 & ANNEX G.

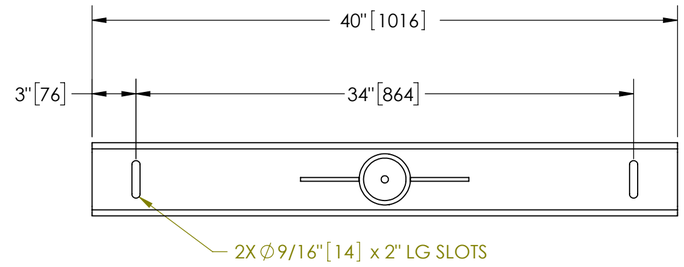


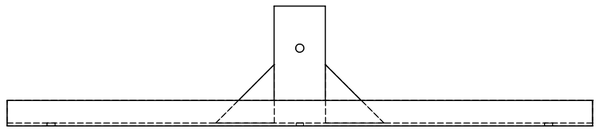

SECTION B-B

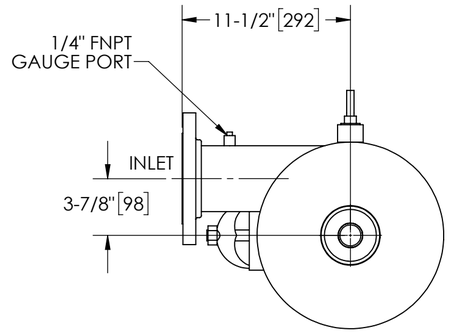

SECTION A-A

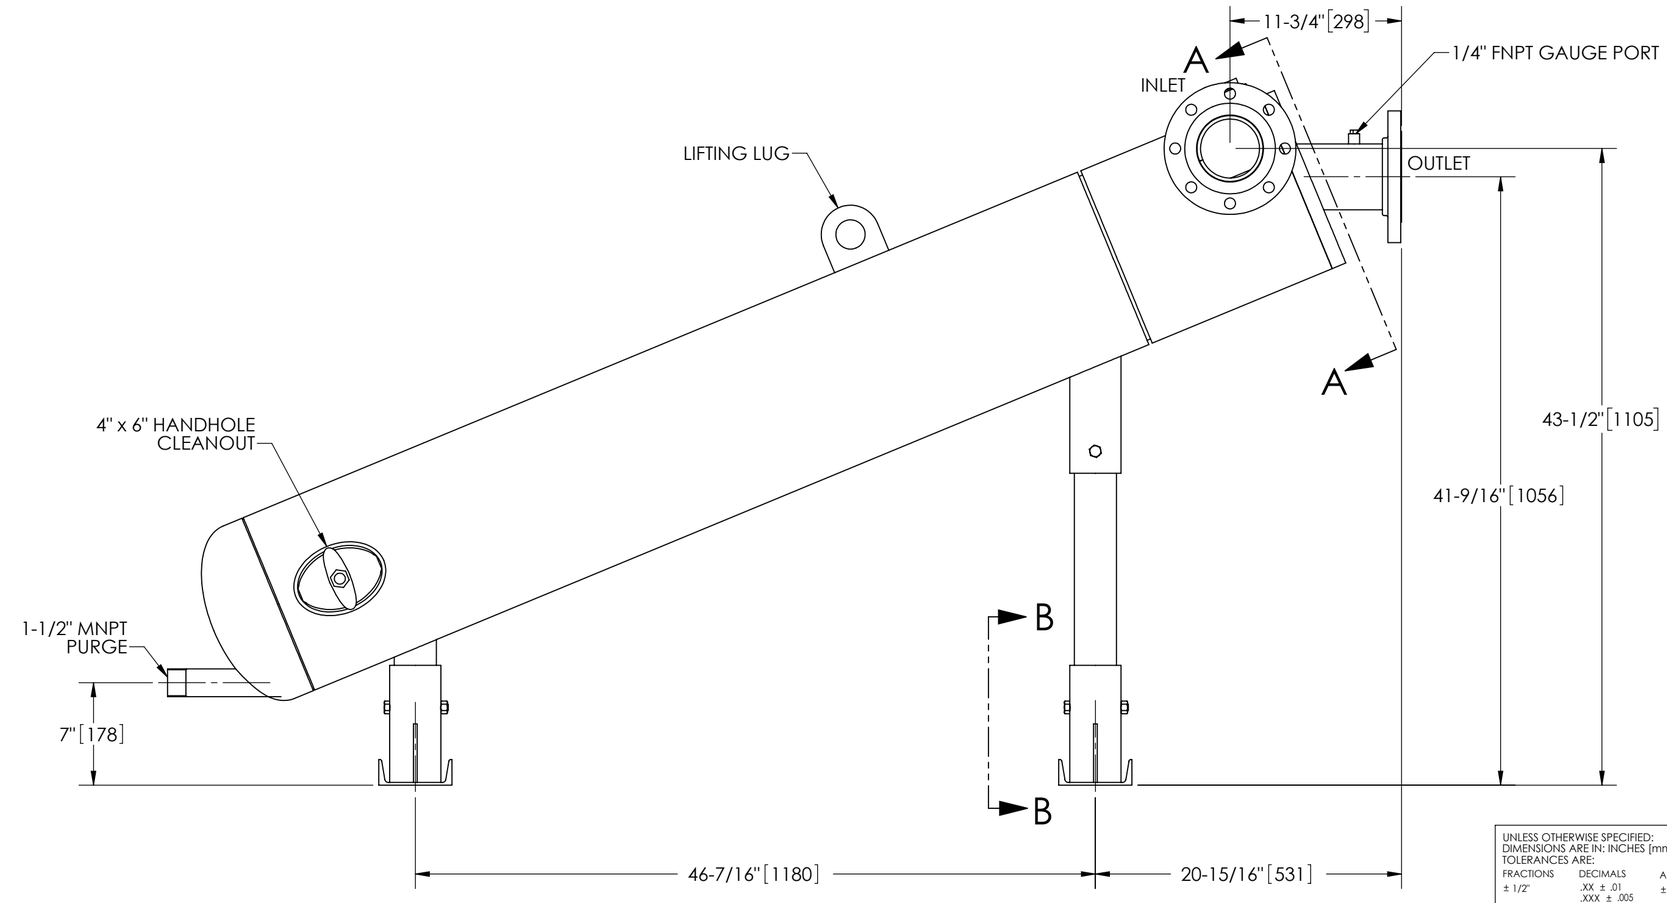

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN: INCHES [mm] TOLERANCES ARE: FRACTIONS ± 1/2" DECIMALS .XX ± .01 .XXX ± .005 .XXXX ± .0005 ANGLES ± 1/4°	ENGINEERED FOR: STANDARD	LAKOS FILTRATION SOLUTIONS® FRESNO, CALIFORNIA WWW.LAKOS.COM
DO NOT SCALE DRAWING	APPROVALS / DATE	TITLE: PWC-1040-L, SEPARATOR 4" PWC LOW PROFILE 9:00, CARBON STEEL
MATERIAL: CLASS P-1 MILD CARBON STEEL	DRAWN: TRR 5/31/22	SIZE: C · MODEL NO. · DWG NO.: 133375-09 · REV.: A
FINISH: POWDERCOAT LAKOS MEDIUM GRAY RAL-7005	ENGR	SCALE: 1:8 · EST. WT.: 556 lb · SHEET: 1 OF 1
	REVIEW	
	WORK ORDER / QTY.	

DWG NO. 133375-09 · SH 1 · REV. A

GEDO
Distribution et conseil : GEDO FRANCE
04 85 88 02 75 | separateur@gedo.fr | separateurs.gedo.fr
565 avenue du Prado - 13008 Marseille - France