
EXCEPT AS OTHERWISE PROVIDED BY CONTRACT, THIS DRAWING AND SPECIFICATIONS SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF MATTER DEPICTED HEREIN WITHOUT THE EXPRESSED WRITTEN PERMISSION OF THE CLAUDE LAVAL CORPORATION, OR ITS ASSIGNEES.


| REVISION HISTORY | | | | |
|---|---|---|---|---|
| ZONE | REV | DESCRIPTION | DATE | APPROVED |

NOTES:


1. INLET & OUTLET ARE 2" GROOVED PIPE.
2. MAXIMUM PRESSURE: 150 psi (10.3 bar).
3. MAXIMUM TEMPERATURE: 180°F (82.2°C).
4. PRESSURE LOSS: 3-12 psid (.2-.8 bar) AT RATED FLOW.
5. RATED FLOW: 60-100 gpm (14-23 $m^3$/hr).
6. APPROXIMATE DRY WEIGHT: 160 lbs (73 kg).
7. FINISH: LAKOS BLACK (EXTERIOR ONLY).

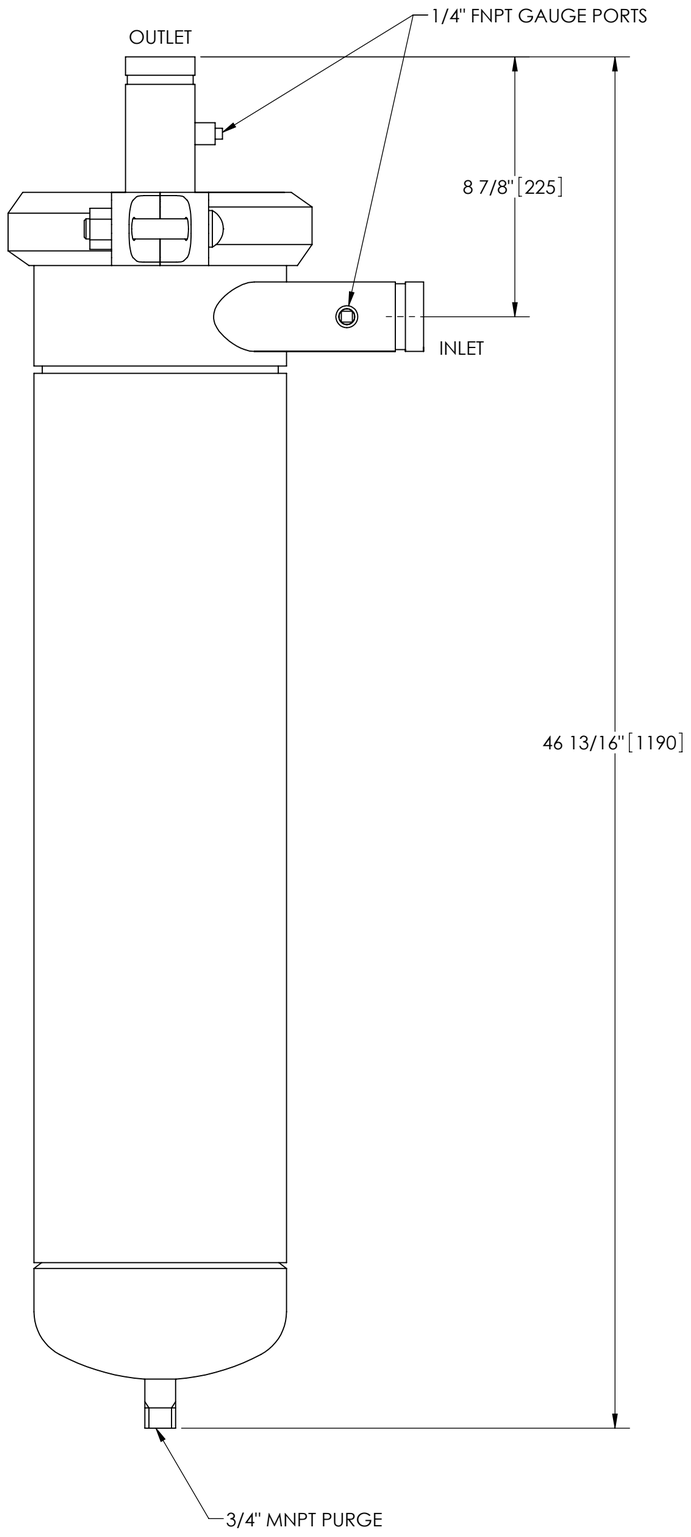


THIS DRAWING HAS BEEN GENERATED AND IS MAINTAINED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY AN APPROVED ENGINEERING CHANGE ORDER (ECO).
PAPER COPIES ARE UNCONTROLLED.

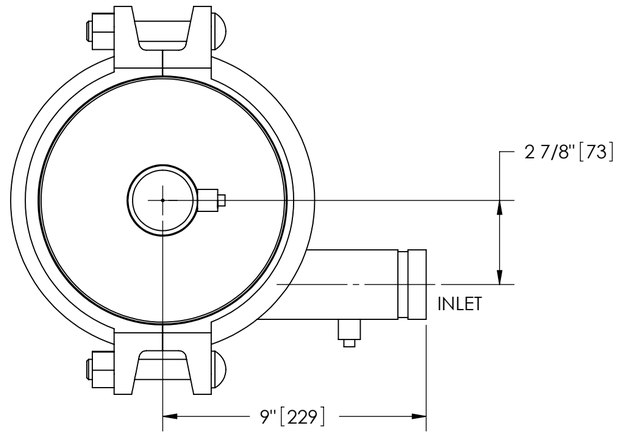


## TOP VIEW

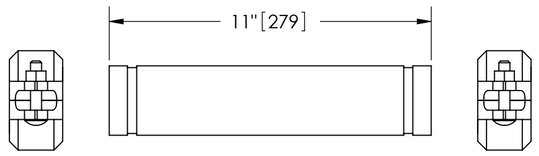


## GROOVED SPOOL

MODEL GCS-0060 (AVAILABLE SEPARATELY)
REQUIRED FOR REMOVAL OF TOP ASSEMBLY

## SUBMITTAL DRAWING

This drawing is submitted for spatial consideration only. Do not pre-plumb to these dimensions.

| | | | |
|---|---|---|---|
| UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN: INCHES [mm] TOLERANCES ARE: FRACTIONS ± 1/4" DECIMALS .XX ± .01 .XXX ± .005 .XXXX ± .0005 ANGLES ± 1/4" | ENGINEERED FOR: STANDARD | CLAUDE LAVAL CORP. FRESNO, CALIFORNIA 93727 WWW.LAKOS.COM | LAVAL UNDERGROUND SURVEYS |
| DO NOT SCALE DRAWING | APPROVALS / DRAWN: DLW 1/16/06 | TITLE: HTX-0060, SEPARATOR, 60-100 gpm, CARBON STEEL | |
| MATERIAL: CLASS P-1 MILD CARBON STEEL | ENGR: 2/3/06 | | |
| FINISH: LAKOS BLACK | MFG: - - | SIZE: C MODEL NO. | DWG NO.: 115276 REV.: D |
| | WORK ORDER: QTY. | SCALE: 1:4 | EST. WT.: 160 lb SHEET: 1 OF 1 |

DWG NO. 115276 SH 1 REV. D

**Distribution et conseil : GEDO FRANCE**
04 85 88 02 75 | separateur@gedo.fr | separateurs.gedo.fr
565 avenue du Prado - 13008 Marseille - France