
EXCEPT AS OTHERWISE PROVIDED BY CONTRACT, THIS DRAWING AND SPECIFICATIONS SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF MATTER DEPICTED HEREIN WITHOUT THE EXPRESSED WRITTEN PERMISSION OF THE CLAUDE LAVAL CORPORATION, OR ITS ASSIGNEES.

| REVISION HISTORY | | | | |
|---|---|---|---|---|
| ZONE | REV | DESCRIPTION | DATE | APPROVED |


NOTES:

1. INLET & OUTLET ARE 6" GROOVED PIPE.
2. MAXIMUM PRESSURE: 150 psi (10.3 bar).
3. MAXIMUM TEMPERATURE: 180ºF (82.2ºC).
4. PRESSURE LOSS: 3-12 psid (.2-.8 bar) AT RATED FLOW.
5. RATED FLOW: 450-825 gpm (102-187 m³/hr).
6. APPROXIMATE DRY WEIGHT: 634 lbs (288 kg).
7. FINISH: LAKOS BLACK (EXTERIOR ONLY).


THIS DRAWING HAS BEEN GENERATED AND IS MAINTAINED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY AN APPROVED ENGINEERING CHANGE ORDER (ECO).
PAPER COPIES ARE UNCONTROLLED.

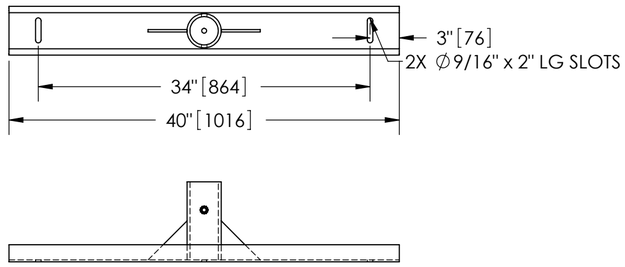



SECTION B-B

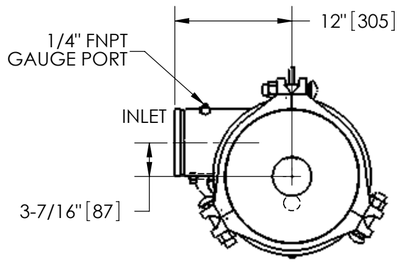


SECTION A-A

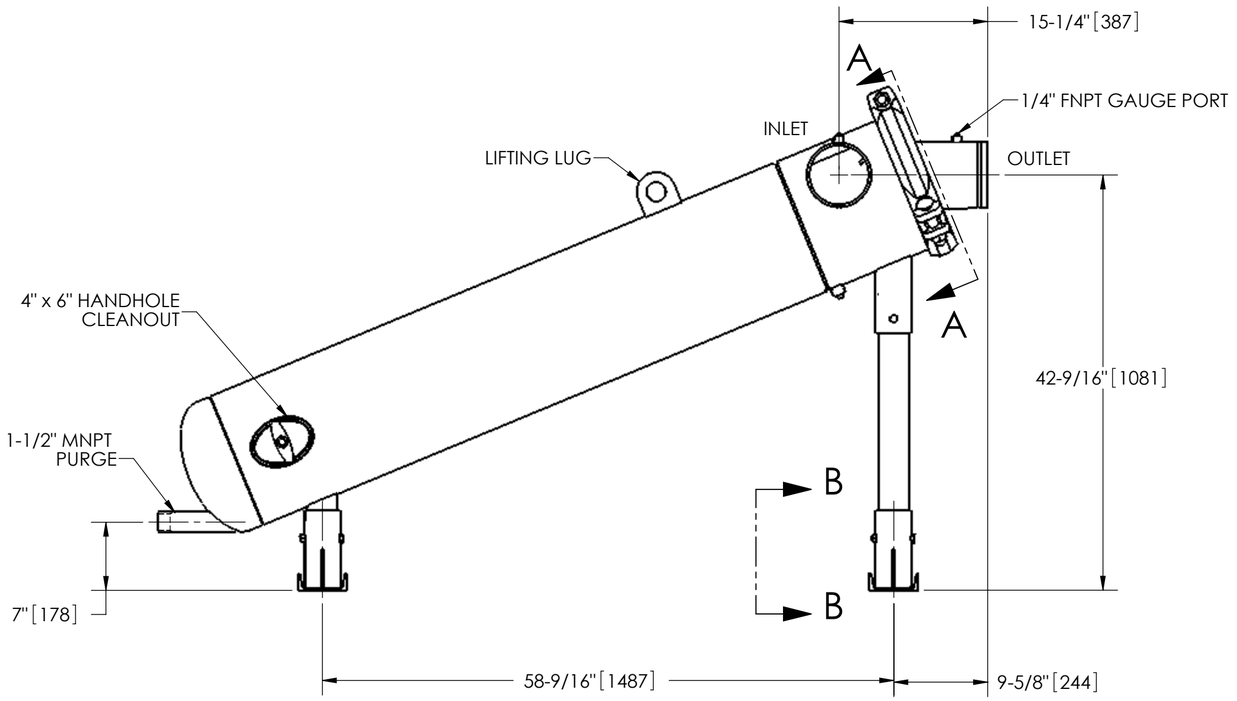


GROOVED SPOOL
MODEL GCS-0450/500/650 (AVAILABLE SEPARATELY)
REQUIRED FOR REMOVAL OF TOP ASSEMBLY

SUBMITTAL DRAWING

This drawing is submitted for spatial consideration only. Do not pre-plumb to these dimensions.

DWG NO. 115279 SH 1 REV. E

| | | | |
|---|---|---|---|
| UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN: INCHES [mm] TOLERANCES ARE: FRACTIONS ± 1/2" DECIMALS .XX ± .01 .XXX ± .005 .XXXX ± .0005 ANGLES ± 1/4° | ENGINEERED FOR: STANDARD | LAKOS CLAUDE LAVAL CORP. FRESNO, CALIFORNIA 93727 WWW.LAKOS.COM | LAVAL UNDERGROUND SURVEYS |
| DO NOT SCALE DRAWING | APPROVALS / DATE | TITLE: HTX-0450-L, SEPARATOR, 450-825 gpm, CARBON STEEL | |
| MATERIAL: CLASS P-1 MILD CARBON STEEL | DRAWN: DLW 1/16/06 | | |
| FINISH: LAKOS BLACK | ENGR: 2/3/06 | SIZE: C | MODEL NO. |
| | MFG: - - | DWG NO.: 115279 | REV.: E |
| | WORK ORDER / QTY. | SCALE: 1:12 | EST. WT.: 634 lb SHEET: 1 OF 1 |

GEDO
Distribution et conseil : GEDO FRANCE
04 85 88 02 75 | separateur@gedo.fr | separateurs.gedo.fr
565 avenue du Prado - 13008 Marseille - France