
EXCEPT AS OTHERWISE PROVIDED BY CONTRACT, THIS DRAWING AND SPECIFICATIONS SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF MATTER DEPICTED HEREIN WITHOUT THE EXPRESSED WRITTEN PERMISSION OF THE CLAUDE LAVAL CORPORATION, OR ITS ASSIGNEES.


REVISION HISTORY				
ZONE	REV	DESCRIPTION	DATE	APPROVED

NOTES:


1. INLET & OUTLET ARE 3" GROOVED PIPE.
2. MAXIMUM PRESSURE: 150 psi (10.3 bar).
3. MAXIMUM TEMPERATURE: 180ºF (82.2ºC).
4. PRESSURE LOSS: 3-12 psid (.2-.8 bar) AT RATED FLOW.
5. RATED FLOW: 130-225 gpm (30-51 m³/hr).
6. APPROXIMATE DRY WEIGHT: 214 lbs (97 kg).
7. FINISH: LAKOS BLACK (EXTERIOR ONLY).

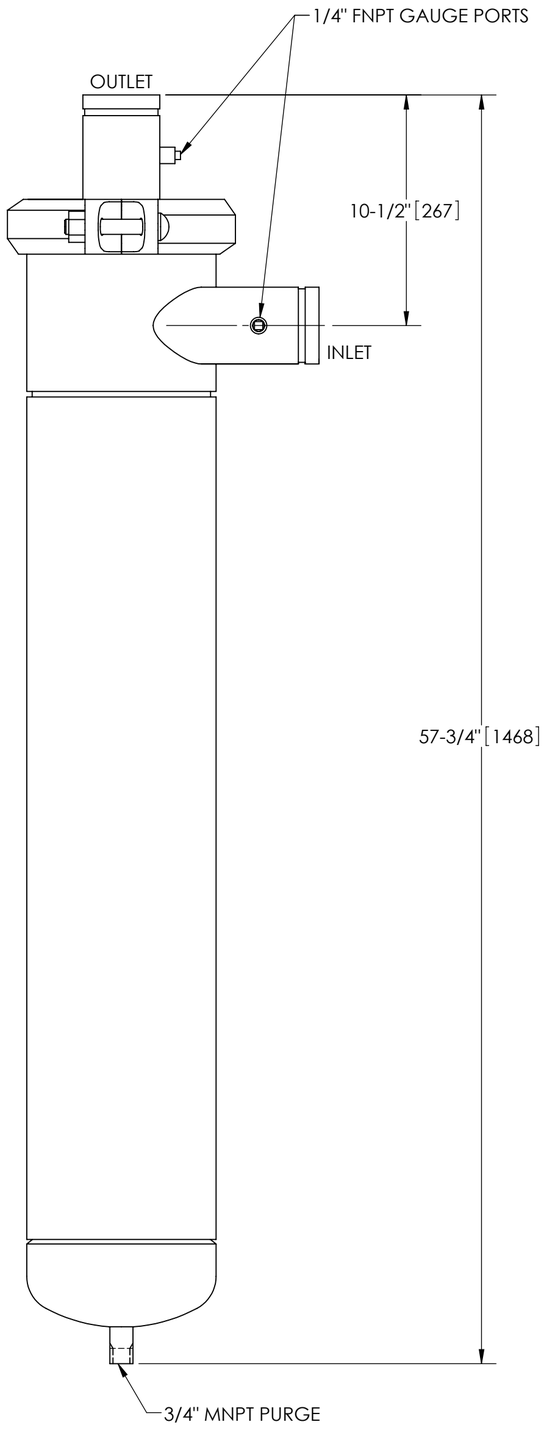

THIS DRAWING HAS BEEN GENERATED AND IS MAINTAINED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY AN APPROVED ENGINEERING CHANGE ORDER (ECO).
PAPER COPIES ARE UNCONTROLLED.

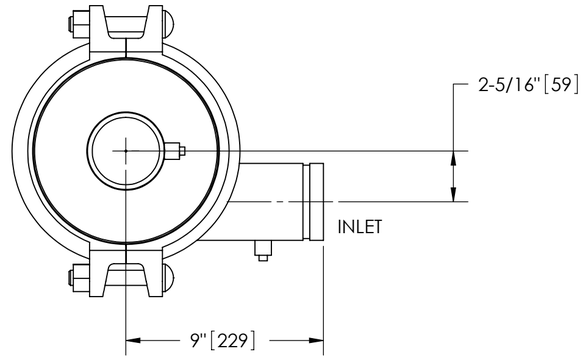

TOP VIEW

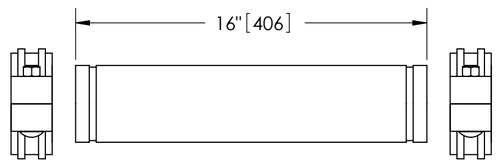

GROOVED SPOOL

MODEL GCS-0130 (AVAILABLE SEPARATELY)
REQUIRED FOR REMOVAL OF TOP ASSEMBLY

SUBMITTAL DRAWING

This drawing is submitted for spatial consideration only. Do not pre-plumb to these dimensions.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN: INCHES [mm] TOLERANCES ARE: FRACTIONS ± 1/4" DECIMALS .XX ± .01 .XXX ± .005 .XXXX ± .0005 ANGLES ± 1/4°	ENGINEERED FOR: STANDARD	LAKOS	CLAUDE LAVAL CORP. FRESNO, CALIFORNIA 93727 WWW.LAKOS.COM — LAVAL UNDERGROUND SURVEYS
DO NOT SCALE DRAWING	APPROVALS / DATE		
MATERIAL: CLASS P-1 MILD CARBON STEEL	DRAWN: DLW 1/16/06	TITLE	HTX-0130, SEPARATOR, 130-225 gpm, CARBON STEEL
FINISH: LAKOS BLACK	ENGR: JBI 4/6/09	SIZE: C	MODEL NO.
	MFG: - -	DWG NO.	115277
	WORK ORDER: QTY.	REV.	D
		SCALE	3:16
		EST. WT.	214 lb
		SHEET	1 OF 1

DWG NO. 115277 SH 1 REV. D

GEDO
Distribution et conseil : GEDO FRANCE
04 85 88 02 75 | separateur@gedo.fr | separateurs.gedo.fr
565 avenue du Prado - 13008 Marseille - France