EXCEPT AS OTHERWISE PROVIDED BY CONTRACT, THIS DRAWING AND SPECIFICATIONS SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF MATTER DEPICTED HEREIN WITHOUT THE EXPRESSED WRITTEN PERMISSION OF THE CLAUDE LAVAL CORPORATION, OR ITS ASSIGNEES.

THIS DRAWING HAS BEEN GENERATED AND IS MAINTAINED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY AN APPROVED ENGINEERING CHANGE ORDER (ECO).
PAPER COPIES ARE UNCONTROLLED.


SUBMITTAL DRAWING


This drawing is submitted for spatial consideration only. Do not pre-plumb to these dimensions.

REVISIONS				
ECN	REV.	DESCRIPTION	DATE	APPROVED
	01	RELEASED FOR SUBMITTAL	10/13/16	CAL
	A	RELEASE FOR MANUFACTURING	6/1/2022	TRR


NOTES:


1. INLET & OUTLET FLANGES ARE 6" 150# RF PER ANSI B16.5 REQUIRING 8X ∅3/4" BOLTS (BOLTS AND GASKETS NOT INCLUDED).
2. MAXIMUM PRESSURE: 150 psi (10.3 bar).
3. MAXIMUM TEMPERATURE: 180°F (82°C).
4. PRESSURE LOSS: 3-15 psid (.21-1.03 bar) AT RATED FLOW.
5. RATED FLOW: 370-820 gpm (84-186 m³/hr).
6. APPROXIMATE DRY WEIGHT: 778 lbs (353 kg).
7. FINISH: POWDERCOAT LAKOS MEDIUM GRAY RAL-7005 (EXTERIOR ONLY).
8. CERTIFIED UNDER NSF/ANSI STANDARD NSF-61 & ANNEX G.

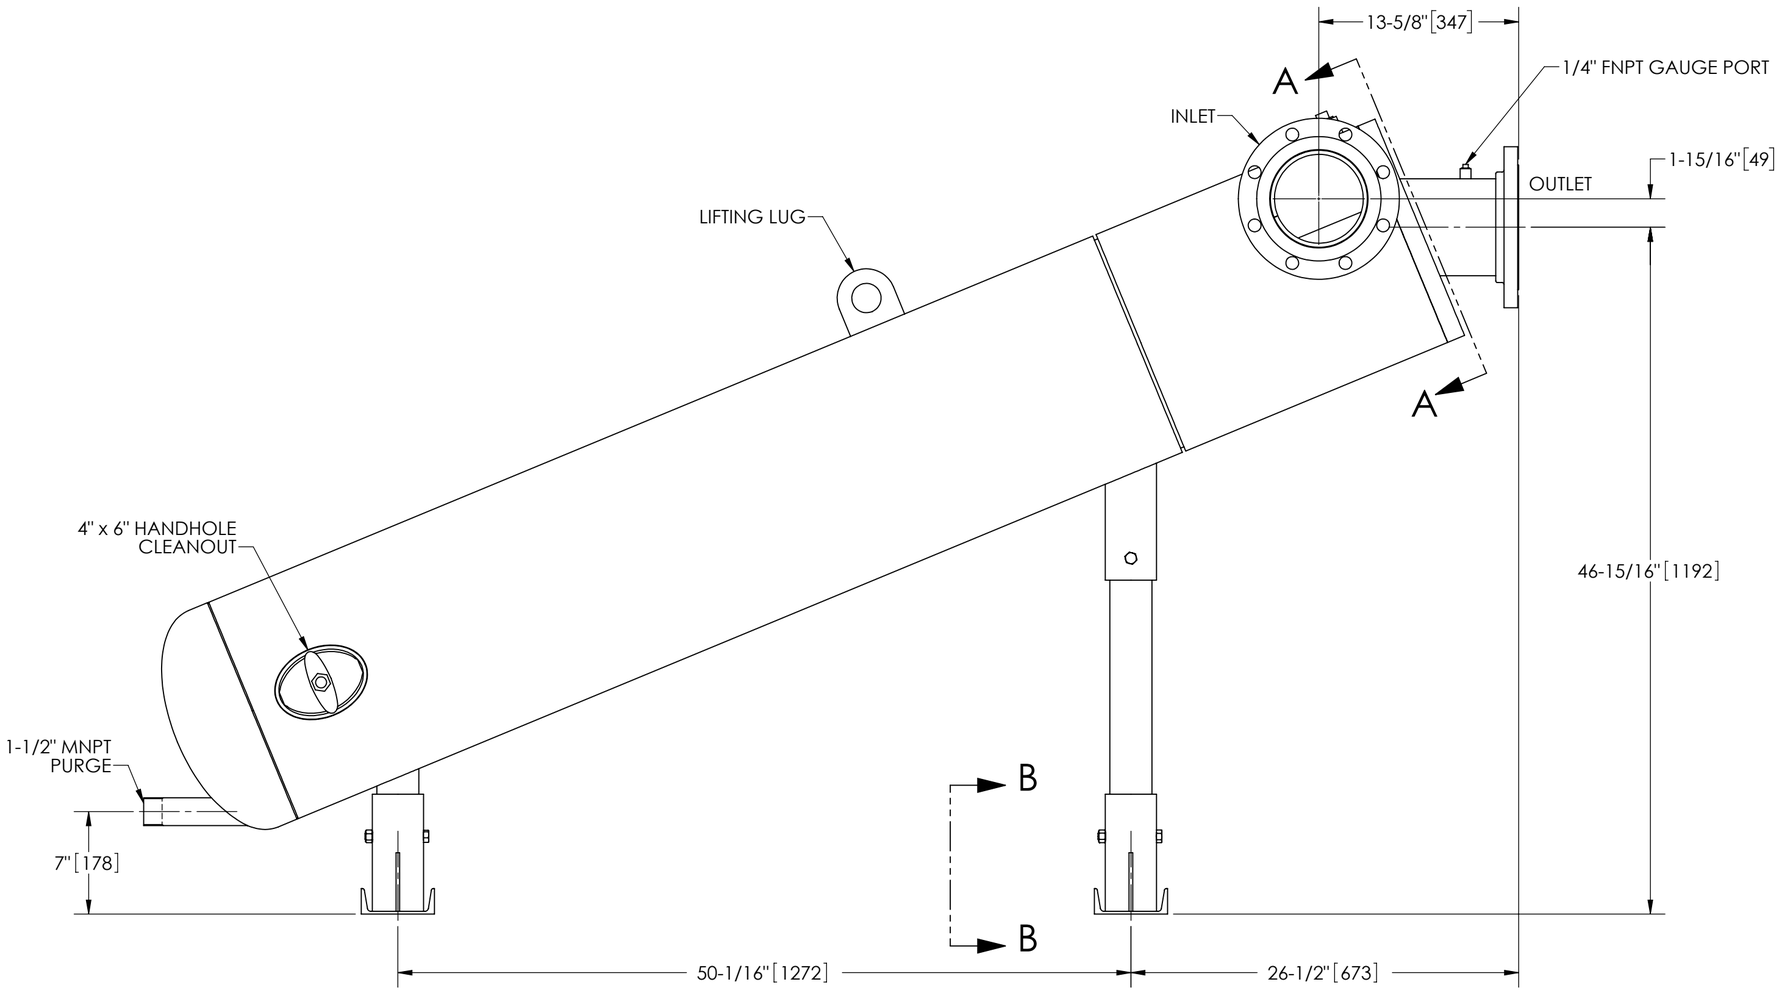

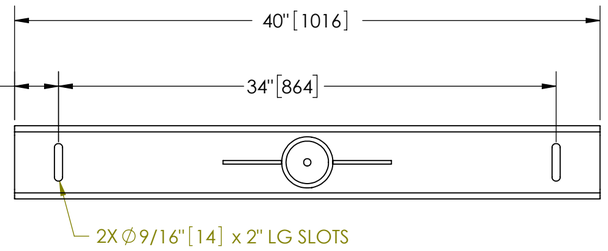

SECTION B-B

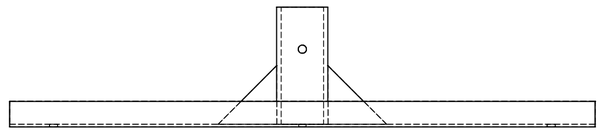

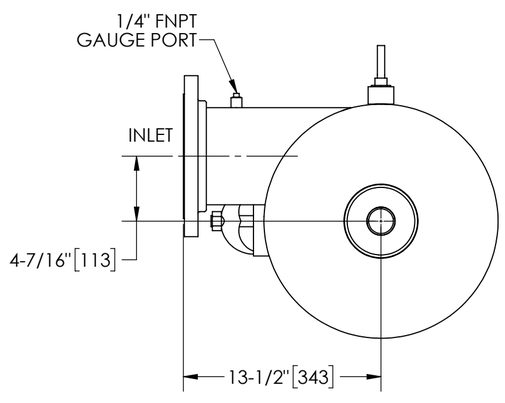

SECTION A-A

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN: INCHES [mm] TOLERANCES ARE: FRACTIONS ± 1" DECIMALS .XX ± .01 .XXX ± .005 .XXXX ± .0005 ANGLES ± 1/4°	ENGINEERED FOR: STANDARD	LAKOS®	CLAUDE LAVAL CORP. FRESNO, CALIFORNIA 93727 WWW.LAKOS.COM
DO NOT SCALE DRAWING	APPROVALS / DATE	TITLE	PWC-1050-L, SEPARATOR, 370-820 GPM, CARBON STEEL
MATERIAL: CLASS P-1 MILD CARBON STEEL	DRAWN: CAL 10/13/16		
FINISH: POWDERCOAT LAKOS MEDIUM GRAY RAL-7005	ENGR: - -	SIZE: C	MODEL NO.:
	MFG: - -	DWG NO.: 133377-09	REV.: A
	WORK ORDER / QTY.	SCALE: 1:8	EST. WT.: 778 lb
		SHEET: 1 OF 1	

DWG NO. 133377-09 SH 1 REV. A

Distribution et conseil : GEDO FRANCE
04 85 88 02 75 | separateur@gedo.fr | separateurs.gedo.fr
565 avenue du Prado - 13008 Marseille - France