EXCEPT AS OTHERWISE PROVIDED BY CONTRACT, THIS DRAWING AND SPECIFICATIONS SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF MATTER DEPICTED HEREIN WITHOUT THE EXPRESSED WRITTEN PERMISSION OF THE LAKOS CORPORATION, OR ITS ASSIGNEES.

THIS DRAWING HAS BEEN GENERATED AND IS MAINTAINED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY AN APPROVED ENGINEERING CHANGE ORDER (ECO).
PAPER COPIES ARE UNCONTROLLED.


REVISIONS				
ECN	REV.	DESCRIPTION	DATE	APPROVED
	A	RELEASED FOR PRODUCTION	1/29/21	TPF


NOTES:

1. INLET & OUTLET FLANGES ARE 6" 150# RF PER ANSI B16.5 REQUIRING 8X ∅3/4" BOLTS (BOLTS AND GASKETS NOT INCLUDED).
2. MAXIMUM PRESSURE: 150 psi (10.3 bar).
3. MAXIMUM TEMPERATURE: 180°F (82°C).
4. PRESSURE LOSS: 3-15 psid (.21-1.03 bar) AT RATED FLOW.
5. RATED FLOW: 550-1200 gpm (125-273 m³/hr).
6. APPROXIMATE DRY WEIGHT: 1128 lbs (512 kg).
7. FINISH: POWDERCOAT LAKOS MEDIUM GRAY RAL-7005 (EXTERIOR ONLY).
8. CERTIFIED UNDER NSF/ANSI STANDARD NSF 61 & ANNEX G.


SUBMITTAL DRAWING


This drawing is submitted for spatial consideration only. Do not pre-plumb to these dimensions.

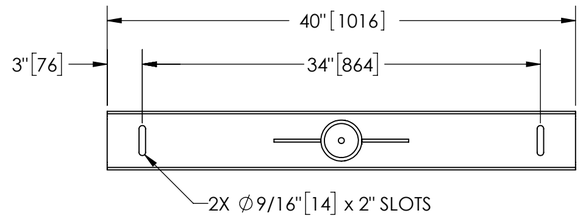



SECTION B-B

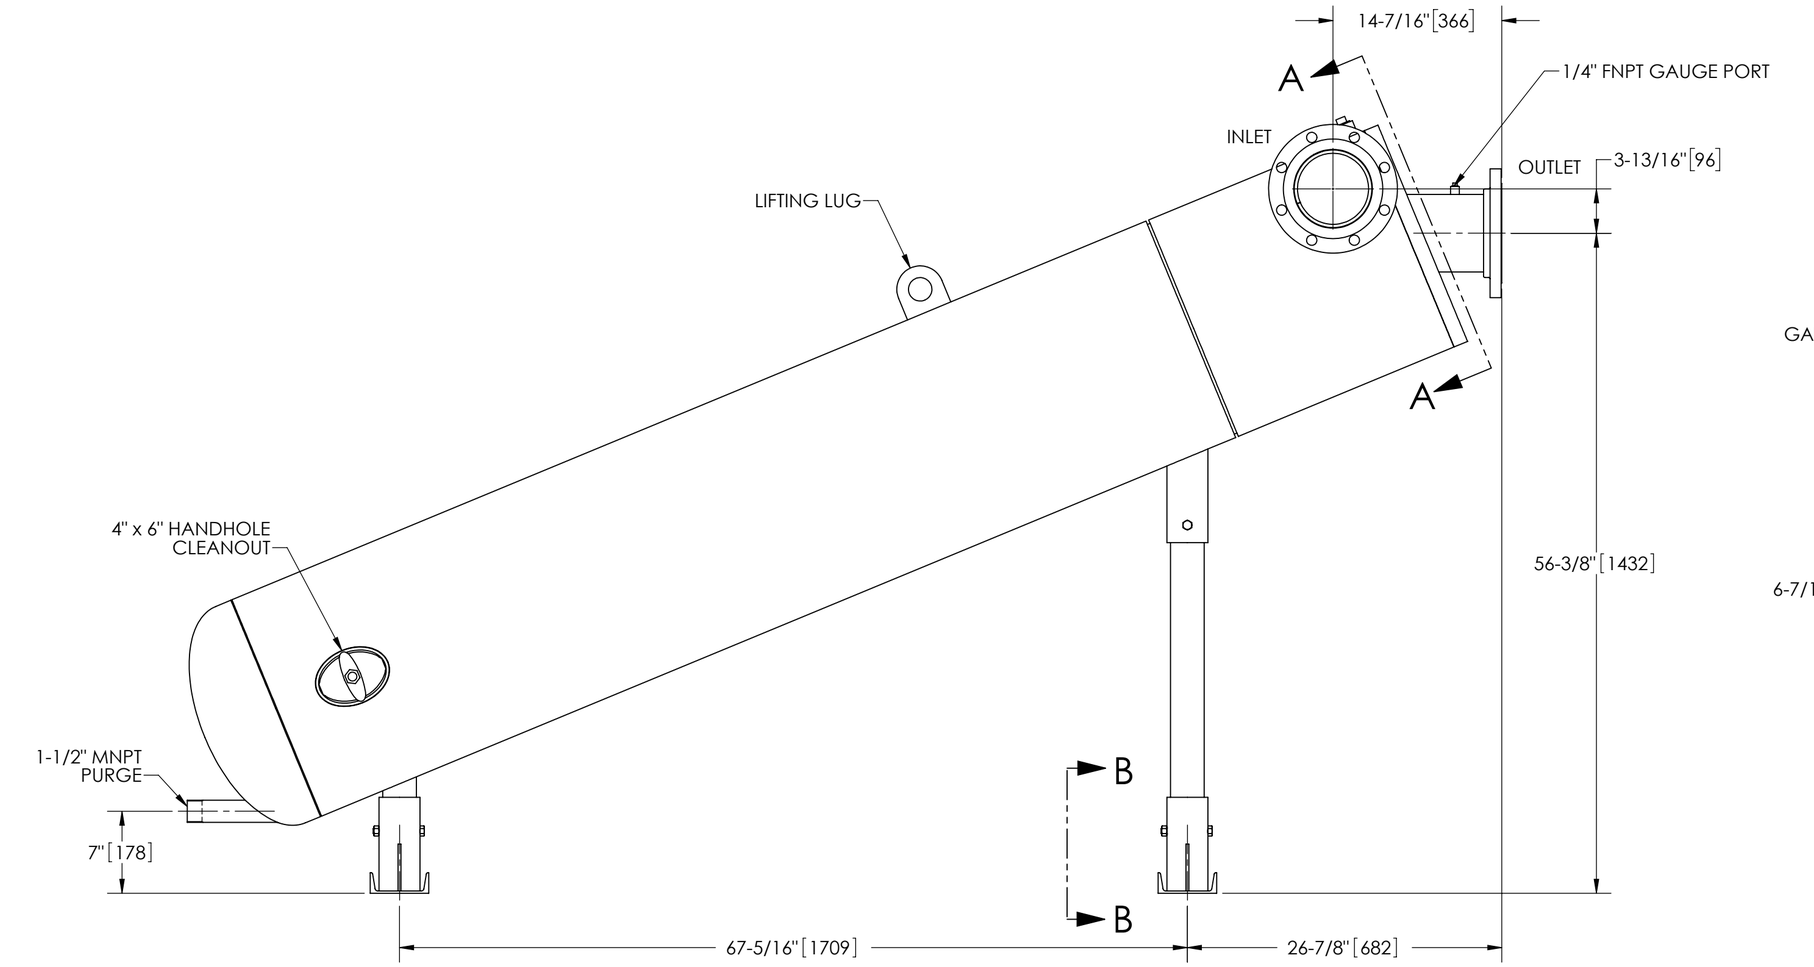

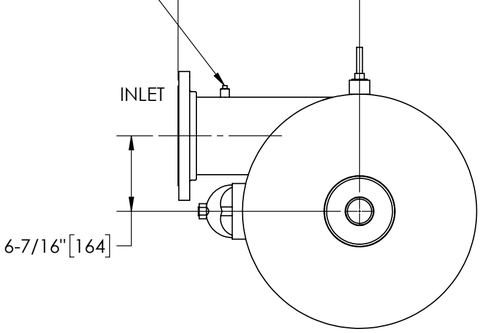

SECTION A-A

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN: INCHES [mm] TOLERANCES ARE: FRACTIONS ± 1/2" DECIMALS .XX ± .01 .XXX ± .005 .XXXX ± .0005 ANGLES ± 1/4°	ENGINEERED FOR: STANDARD	LAKOS FILTRATION SOLUTIONS® FRESNO, CALIFORNIA WWW.LAKOS.COM	
DO NOT SCALE DRAWING	APPROVALS	DATE	TITLE: PWC-1060-L, SEPARATOR, 550-1200 GPM, CARBON STEEL
MATERIAL: CLASS P-1 MILD CARBON STEEL	DRAWN: AMR	12/23/15	SIZE: C · MODEL NO. · DWG NO.: 133379-09 · REV.: A
FINISH: POWDERCOAT LAKOS MEDIUM GREY RAL-7005	ENGR		SCALE: 1:10 · EST. WT.: 1128 lb · SHEET: 1 OF 1
	REVIEW		
	WORK ORDER	QTY.	

DWG NO. 133379-09 SH 1 REV. A

GEDO
Distribution et conseil : GEDO FRANCE
04 85 88 02 75 | separateur@gedo.fr | separateurs.gedo.fr
565 avenue du Prado - 13008 Marseille - France