
EXCEPT AS OTHERWISE PROVIDED BY CONTRACT, THIS DRAWING AND SPECIFICATIONS SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF MATTER DEPICTED HEREIN WITHOUT THE EXPRESSED WRITTEN PERMISSION OF THE CLAUDE LAVAL CORPORATION, OR ITS ASSIGNEES.

REVISIONS				
ECN	REV.	DESCRIPTION	DATE	APPROVED


NOTES:

1. INLET & OUTLET ARE 10" GROOVED PIPE.
2. MAXIMUM PRESSURE: 150 psi (10.3 bar).
3. MAXIMUM TEMPERATURE: 180°F (82.2°C).
4. PRESSURE LOSS: 3-12 psid (.2-.8 bar) AT RATED FLOW.
5. RATED FLOW: 1275-3100 gpm (290-704 m³/hr).
6. APPROXIMATE DRY WEIGHT: 1280 lbs (581 kg).
7. FINISH: LAKOS BLACK (EXTERIOR ONLY).

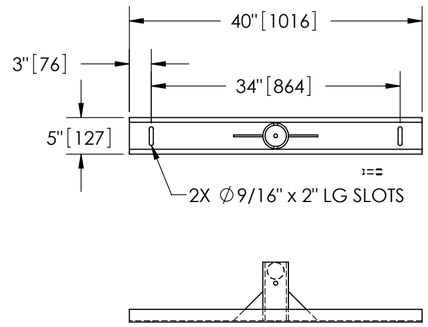



SECTION B-B

THIS DRAWING HAS BEEN GENERATED AND IS MAINTAINED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY AN APPROVED ENGINEERING CHANGE ORDER (ECO).
PAPER COPIES ARE UNCONTROLLED.

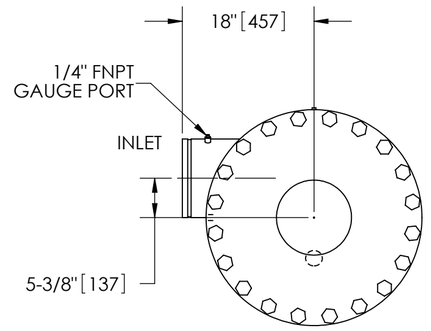

SECTION A-A

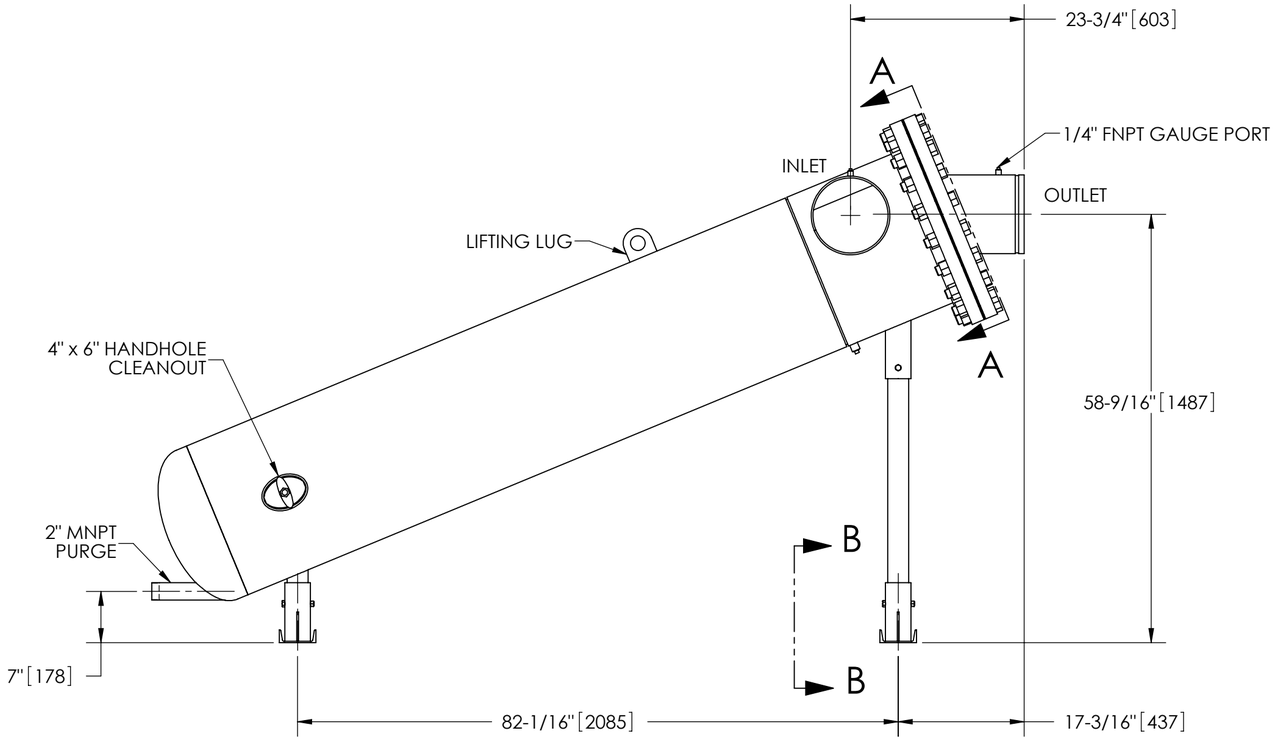



GROOVED SPOOL

MODEL GCS-1275/1850 (AVAILABLE SEPARATELY)
REQUIRED FOR REMOVAL OF TOP ASSEMBLY

SUBMITTAL DRAWING

This drawing is submitted for spatial consideration only. Do not pre-plumb to these dimensions.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN: INCHES [mm] TOLERANCES ARE: FRACTIONS ± 1" DECIMALS .XX ± .01 .XXX ± .005 .XXXX ± .0005 ANGLES ± 1/4°	ENGINEERED FOR: STANDARD	LAKOS	CLAUDE LAVAL CORP. FRESNO, CALIFORNIA 93727 WWW.LAKOS.COM — LAVAL UNDERGROUND SURVEYS
DO NOT SCALE DRAWING	APPROVALS / DATE		
MATERIAL: CLASS P-1 MILD CARBON STEEL	DRAWN: DLW 1/18/06	TITLE: HTX-1275-L, SEPARATOR, 1275-3100 gpm, CARBON STEEL	
FINISH: LAKOS BLACK	ENGR: β 2/3/06	SIZE: C	MODEL NO.
	MFG: - -	DWG NO.: 115285	REV.: F
	WORK ORDER / QTY.	SCALE: 1:16	EST. WT.: 1280 lb SHEET: 1 OF 1

DWG NO. 115285 SH 1 REV. F

GEDO
Distribution et conseil : GEDO FRANCE
04 85 88 02 75 | separateur@gedo.fr | separateurs.gedo.fr
565 avenue du Prado - 13008 Marseille - France