
EXCEPT AS OTHERWISE PROVIDED BY CONTRACT, THIS DRAWING AND SPECIFICATIONS SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF MATTER DEPICTED HEREIN WITHOUT THE EXPRESSED WRITTEN PERMISSION OF THE LAKOS CORPORATION, OR ITS ASSIGNEES.


REVISION HISTORY				
ZONE	REV	DESCRIPTION	DATE	APPROVED
ECN-0101	M	UPDATED TO CURRENT STANDARDS	3/27/26	FR

NOTES:


1. INLET & OUTLET FLANGES ARE 6" 150# RF PER ANSI B16.5 REQUIRING 8X ∅3/4" BOLTS (BOLTS AND GASKETS NOT INCLUDED).
2. MAXIMUM PRESSURE: 150 psi (10.3 bar).
3. MAXIMUM TEMPERATURE: 180°F (82.2°C).
4. PRESSURE LOSS: 3-12 psid (.2-.8 bar) AT RATED FLOW.
5. RATED FLOW: 450-825 gpm (102-187 m³/hr).
6. APPROXIMATE DRY WEIGHT: 683 lbs (309 kg).
7. FINISH: LAKOS BLUE (EXTERIOR ONLY).

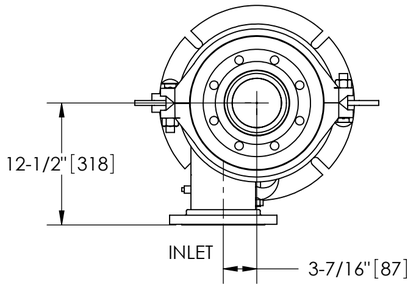



THIS DRAWING HAS BEEN GENERATED AND IS MAINTAINED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY AN APPROVED ENGINEERING CHANGE ORDER (ECO).
PAPER COPIES ARE UNCONTROLLED.

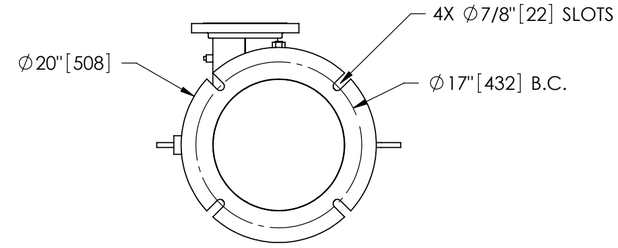

BOTTOM VIEW

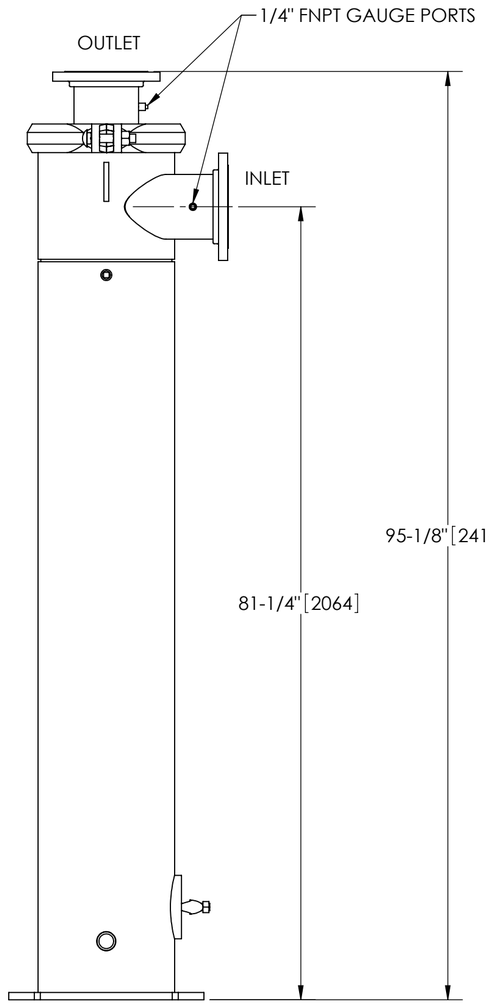

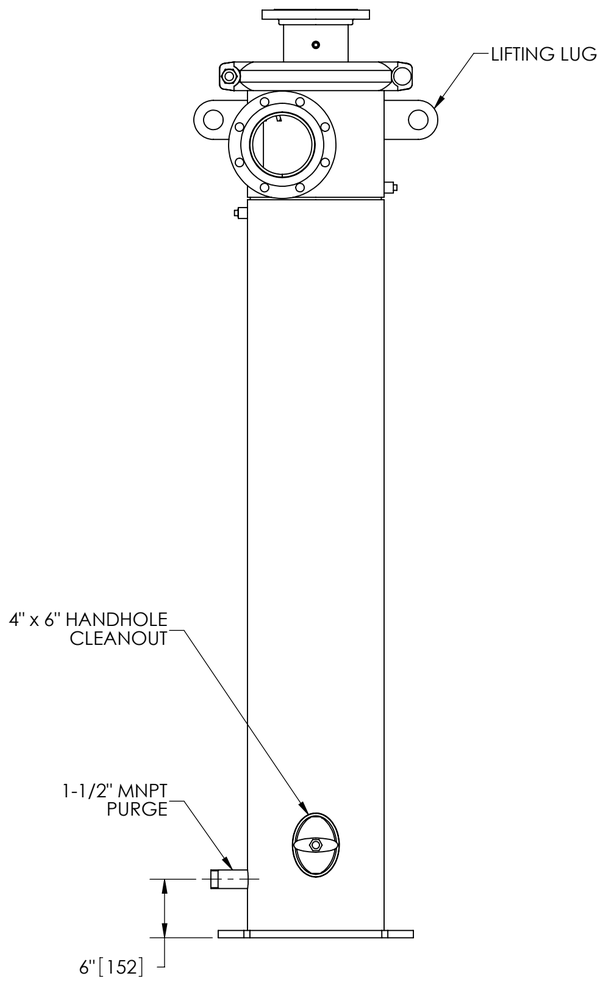



FLANGED SPOOL

MODEL FS-06 (AVAILABLE SEPARATELY)
REQUIRED FOR REMOVAL OF TOP ASSEMBLY

SUBMITTAL DRAWING

This drawing is submitted for spatial consideration only. Do not pre-plumb to these dimensions.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN: INCHES [mm] TOLERANCES ARE: FRACTIONS ± 1/4" DECIMALS .XX ± .01 .XXX ± .005 .XXXX ± .0005 ANGLES ± 1/4°	ENGINEERED FOR: FLANGED	LAKOS FILTRATION SOLUTIONS FRESNO, CALIFORNIA WWW.LAKOS.COM	
DO NOT SCALE DRAWING	APPROVALS	DATE	TITLE: JPX-0450-V/FLG, SEPARATOR, 450-825 gpm, CARBON STEEL
MATERIAL: CLASS P-1 MILD CARBON STEEL	DRAWN: DLW	4/4/06	
FINISH: LAKOS BLUE	ENGR: DLW	4/4/06	SIZE: C · MODEL NO. · DWG NO.: 118120 · REV.: M
	MFG: -	-	SCALE: 1:12 · EST. WT.: 683 lb · SHEET: 1 OF 1
	WORK ORDER	QTY.	

DWG NO. 118120 · SH 1 · REV. M

GEDO
Distribution et conseil : GEDO FRANCE
04 85 88 02 75 | separateur@gedo.fr | separateurs.gedo.fr
565 avenue du Prado - 13008 Marseille - France