EXCEPT AS OTHERWISE PROVIDED BY CONTRACT, THIS DRAWING AND SPECIFICATIONS SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF MATTER DEPICTED HEREIN WITHOUT THE EXPRESSED WRITTEN PERMISSION OF THE LAKOS CORPORATION, OR ITS ASSIGNEES.


REVISIONS				
ECN	REV.	DESCRIPTION	DATE	APPROVED
	01	RELEASED FOR SUBMITTAL	12/21/20	CEE
	A	RELEASE FOR MANUFACTURING	5/31/2022	TRR


NOTES:

1. INLET & OUTLET FLANGES ARE 8" 150# RF PER ANSI B16.5, REQUIRING 8X ∅3/4" BOLTS (BOLTS AND GASKETS NOT INCLUDED).
2. MAXIMUM PRESSURE: 150 psi (10.3 bar).
3. MAXIMUM TEMPERATURE: 180ºF (82ºC).
4. PRESSURE LOSS: 23-15 psid (.21-1.03 bar) AT RATED FLOW.
5. RATED FLOW: 940-2060 gpm (213-468 m³/hr).
6. APPROXIMATE DRY WEIGHT: 1688 lbs (766 kg).
7. FINISH: POWDERCOAT LAKOS MEDIUM GRAY RAL-7005 (EXTERIOR ONLY).
8. CERTIFIED UNDER NSF/ANSI STANDARD NSF 61 & ANNEX G.


SUBMITTAL DRAWING


This drawing is submitted for spatial consideration only. Do not pre-plumb to these dimensions.

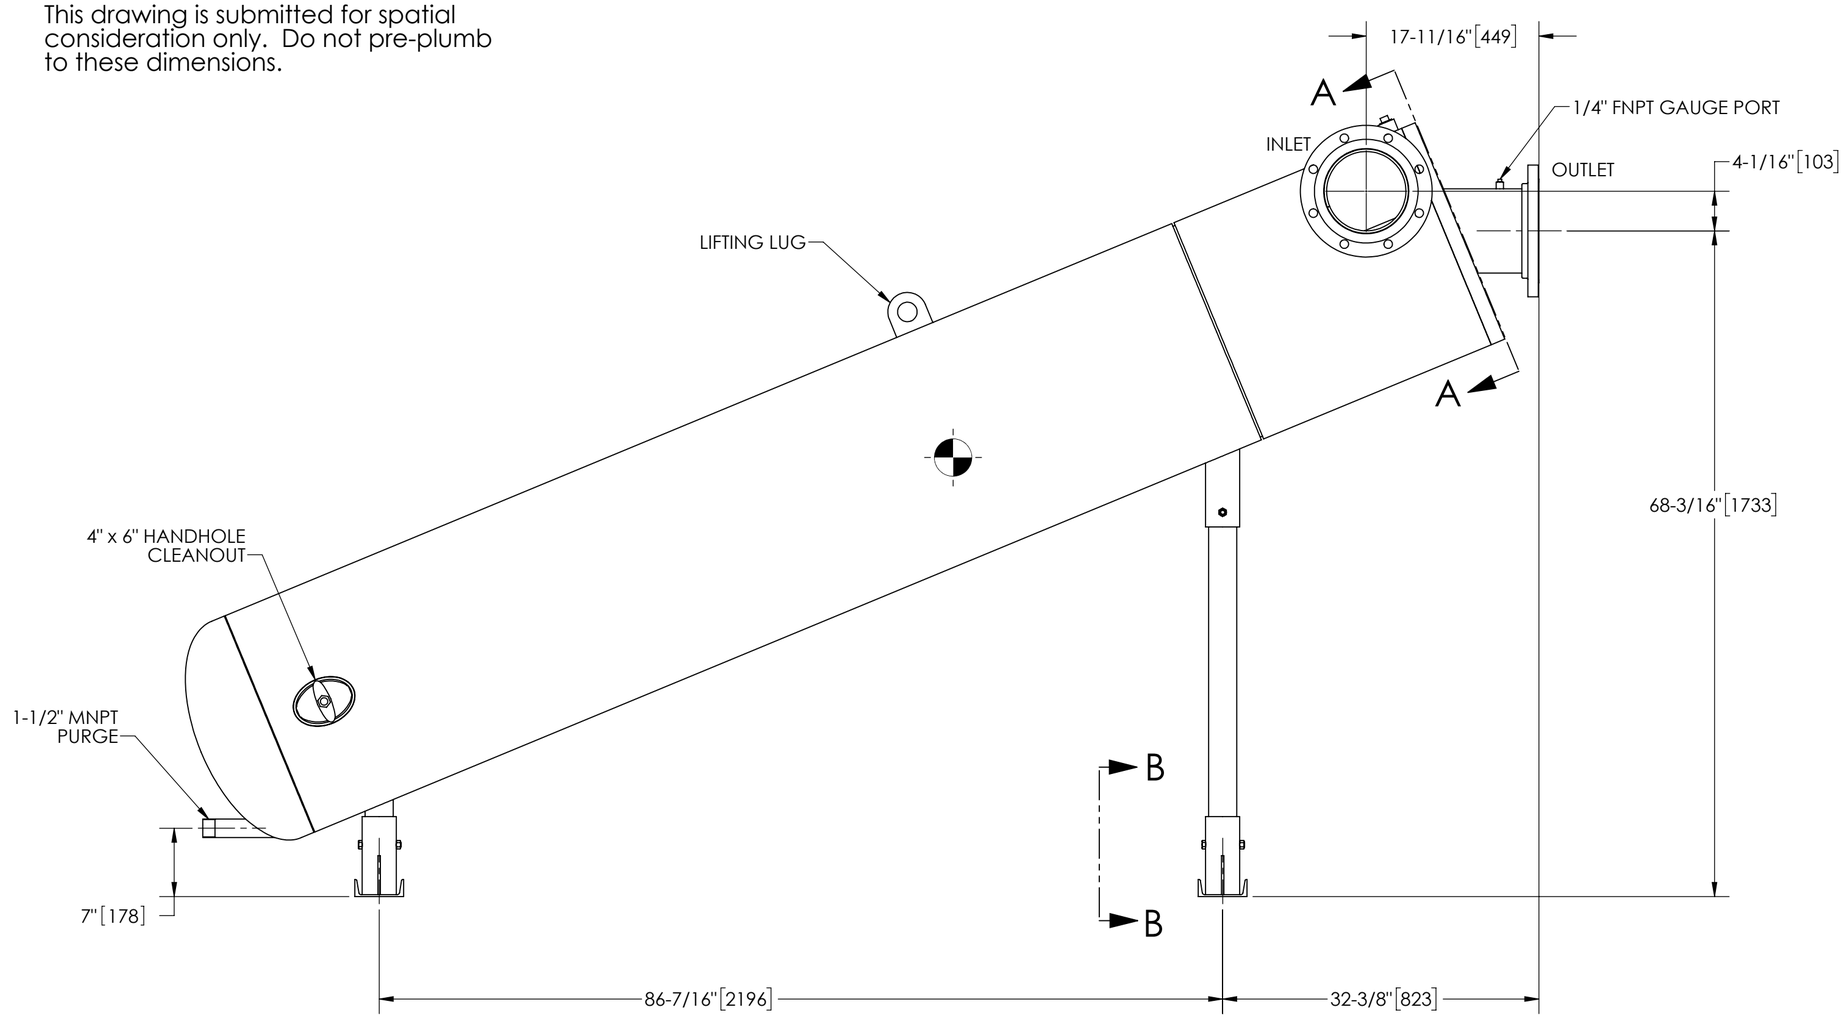

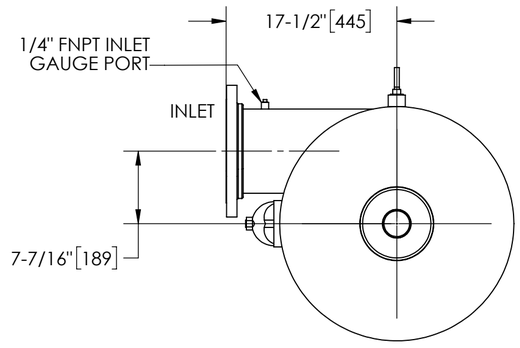

SECTION A-A

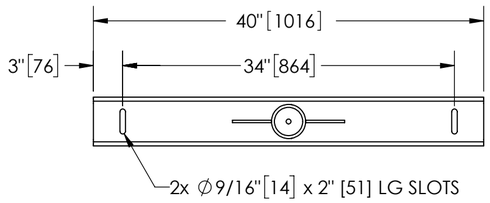



SECTION B-B

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN: INCHES [mm] TOLERANCES ARE: FRACTIONS ± 1/2" DECIMALS .XX ± .01 .XXX ± .005 .XXXX ± .0005 ANGLES ± 1/4°	ENGINEERED FOR: STANDARD	LAKOS FILTRATION SOLUTIONS® FRESNO, CALIFORNIA WWW.LAKOS.COM	
DO NOT SCALE DRAWING	APPROVALS	DATE	TITLE: PWC-1080-L, SEPARATOR, 940-2060 GPM, CARBON STEEL
MATERIAL: CLASS P-1 MILD CARBON STEEL	DRAWN: CEE	12/21/20	
FINISH: POWDERCOAT LAKOS MEDIUM GRAY RAL-7005	ENGR: -	-	SIZE: C · MODEL NO. · DWG NO.: 133381 · REV.: A
	REVIEW: -	-	SCALE: 1:12 · EST. WT.: 1688 lb · SHEET: 1 OF 1
	WORK ORDER	QTY.	

DWG NO. 133381 SH 1 REV. A

GEDO
Distribution et conseil : GEDO FRANCE
04 85 88 02 75 | separateur@gedo.fr | separateurs.gedo.fr
565 avenue du Prado - 13008 Marseille - France