

EXCEPT AS OTHERWISE PROVIDED BY CONTRACT, THIS DRAWING AND SPECIFICATIONS SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF MATTER DEPICTED HEREIN WITHOUT THE EXPRESSED WRITTEN PERMISSION OF THE CLAUDE LAVAL CORPORATION, OR ITS ASSIGNEES.

REVISIONS				
ECN	REV.	DESCRIPTION	DATE	APPROVED
	01	RELEASED FOR SUBMITTAL	1/24/19	CEE

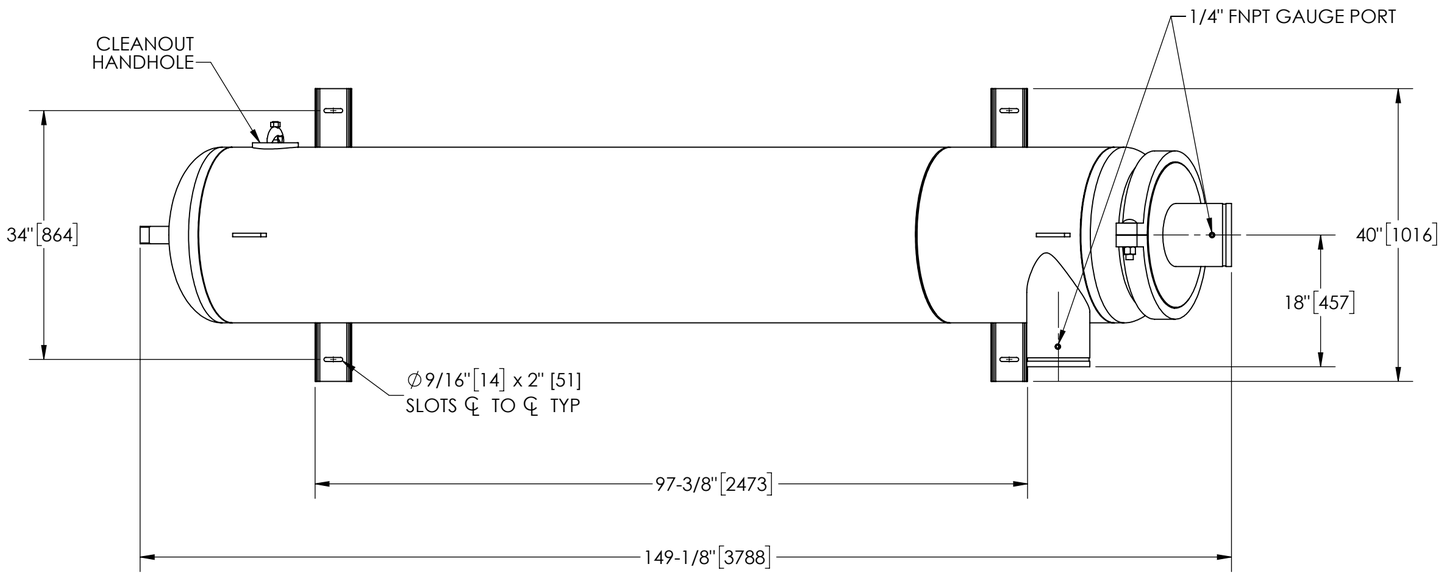

NOTES:

1. INLET & OUTLET ARE 8" GROOVED PIPE.
2. MAXIMUM PRESSURE: 150 psi (10.3 bar).
3. MAXIMUM TEMPERATURE: 180°F (82°C).4.
4. PRESSURE LOSS: 2-15 psid (.14-1.03 bar) AT RATED FLOW.
5. RATED FLOW: 650-1510 gpm (148-343 m³/hr).
6. APPROXIMATE DRY WEIGHT: 1671 lbs (758 kg).
7. FINISH: LAKOS BLACK (EXTERIOR ONLY).

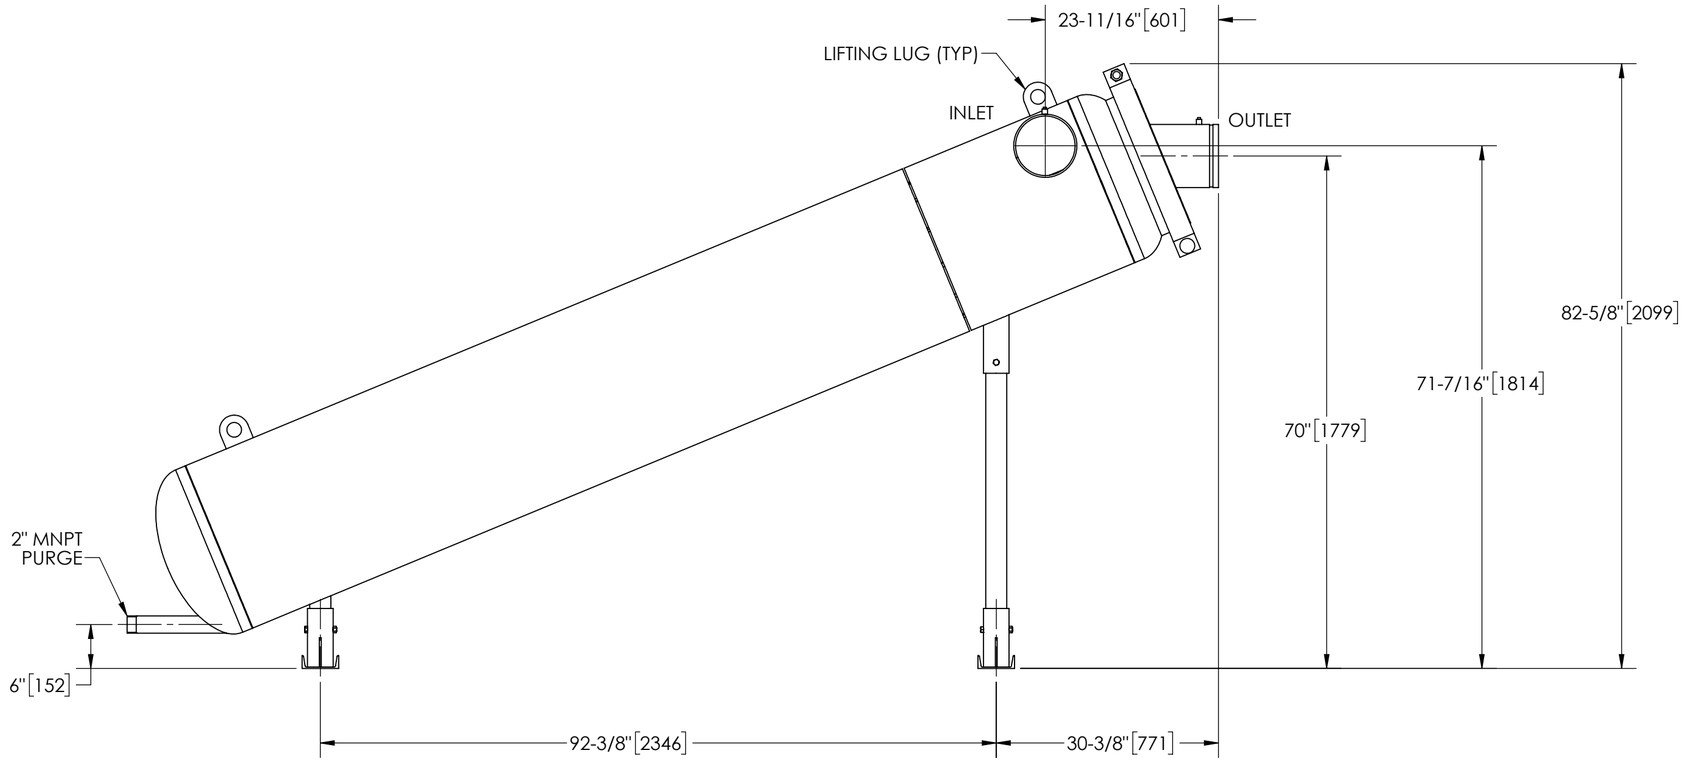

SUBMITTAL DRAWING

This drawing is submitted for spatial consideration only. Do not pre-plumb to these dimensions.

THIS DRAWING HAS BEEN GENERATED AND IS MAINTAINED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY AN APPROVED ENGINEERING CHANGE ORDER (ECO).
PAPER COPIES ARE UNCONTROLLED.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN: INCHES [mm]
TOLERANCES ARE:
FRACTIONS ± 1/4" | DECIMALS .XX ± .01, .XXX ± .005, .XXXX ± .0005 | ANGLES ± 1/4"
DO NOT SCALE DRAWING

MATERIAL: CLASS P-1 MILD CARBON STEEL
FINISH: LAKOS BLACK

ENGINEERED FOR: STANDARD

APPROVALS	DATE
DRAWN CEE	1/22/19
ENGR -	-
MFG -	-
WORK ORDER	QTY.

LAKOS®
CLAUDE LAVAL CORP.
FRESNO, CALIFORNIA 93727
WWW.LAKOS.COM

TITLE: eHTX-0650-L, SEPARATOR
650-1510 gpm, CARBON STEEL

SIZE	MODEL NO.	DWG NO.	REV.
C		138594	01

SCALE 1:16 | EST. WT. 1671 lb | SHEET 1 OF 1

DWG NO. 138594 SH 1 REV. 01

GEDO
Distribution et conseil : GEDO FRANCE
04 85 88 02 75 | separateur@gedo.fr | separateurs.gedo.fr
565 avenue du Prado - 13008 Marseille - France