EXCEPT AS OTHERWISE PROVIDED BY CONTRACT, THIS DRAWING AND SPECIFICATIONS SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF MATTER DEPICTED HEREIN WITHOUT THE EXPRESSED WRITTEN PERMISSION OF THE LAKOS CORPORATION, OR ITS ASSIGNEES.


THIS DRAWING HAS BEEN GENERATED AND IS MAINTAINED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY AN APPROVED ENGINEERING CHANGE ORDER (ECO).


PAPER COPIES ARE UNCONTROLLED.

REVISION HISTORY				
ECN/ECR	REV	DESCRIPTION	DATE	APPROVED
ECN-0101	C	UPDATED WITH INTERNAL VORTUBE	4/14/2025	MA
	D	UPDATE DRAWING VIEWS	3/18/26	AMF


NOTES:

1. INLET & OUTLET FLANGES ARE 3/4" 150# RF PER ANSI B16.5 REQUIRING 4X ∅1/2" BOLTS (BOLTS AND GASKETS NOT INCLUDED).
2. MAXIMUM PRESSURE: 150 psi (10.3 bar).
3. MAXIMUM TEMPERATURE: 180ºF (82.2ºC).
4. PRESSURE LOSS: 3-12 psid (.2-.8 bar) AT RATED FLOW.
5. RATED FLOW: 10-20 gpm (2.5-4.5 m^3/hr).
6. APPROXIMATE DRY WEIGHT: 47 lbs (21 kg).
7. FINISH: LAKOS BLUE (EXTERIOR ONLY).

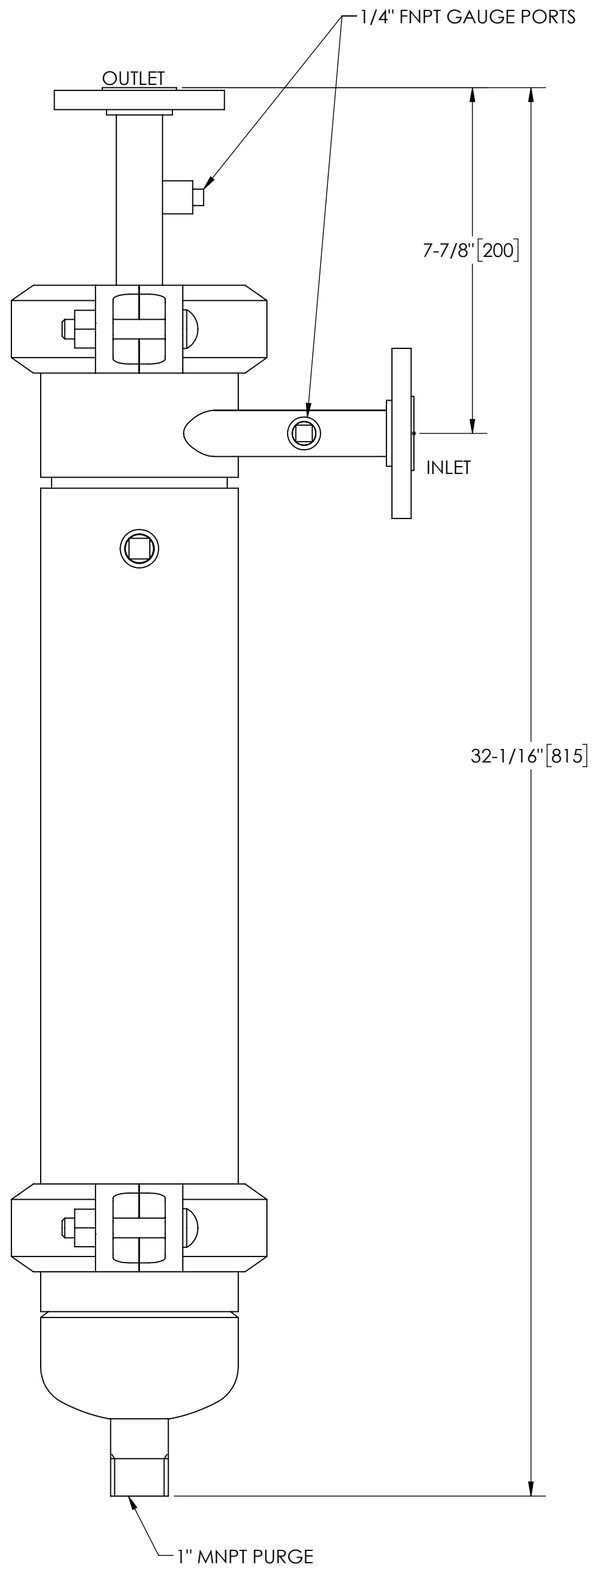

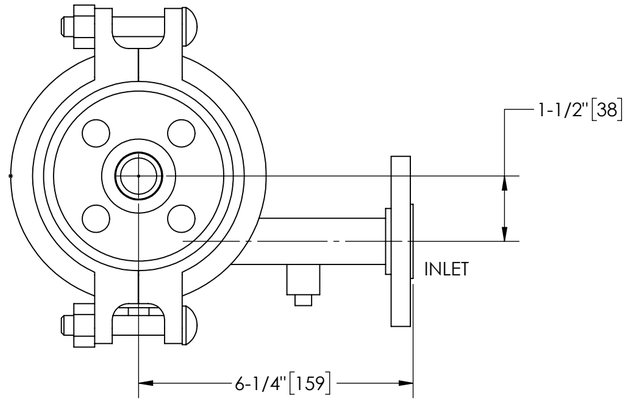

TOP VIEW



FLANGED SPOOL
MODEL FS-0075 (AVAILABLE SEPARATELY)
REQUIRED FOR REMOVAL OF TOP ASSEMBLY

SUBMITTAL DRAWING

This drawing is submitted for spatial consideration only. Do not pre-plumb to these dimensions.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN: INCHES [mm]
TOLERANCES ARE:
FRACTIONS ± 1/2" DECIMALS .XX ± .01 .XXX ± .005 .XXXX ± .0005 ANGLES ± 1/4º
DO NOT SCALE DRAWING
MATERIAL: CLASS P-1 MILD CARBON STEEL
FINISH: LAKOS BLUE

ENGINEERED FOR: W/ FLANGES

APPROVALS	DATE
DRAWN DLW	4/3/06
ENGR DLW	4/3/06
MFG -	-
WORK ORDER	QTY.

LAKOS FILTRATION SOLUTIONS® FRESNO, CALIFORNIA WWW.LAKOS.COM

TITLE: JPX-0010/FLG SEPARATOR 10-20 gpm, CARBON STEEL

SIZE	MODEL NO.	DWG NO.	REV.
C		122365	D
SCALE 3:8		EST. WT. 47 lb	SHEET 1 OF 1

DWG NO. 122365 SH 1 REV D

GEDO
Distribution et conseil : GEDO FRANCE
04 85 88 02 75 | separateur@gedo.fr | separateurs.gedo.fr
565 avenue du Prado - 13008 Marseille - France