
EXCEPT AS OTHERWISE PROVIDED BY CONTRACT, THIS DRAWING AND SPECIFICATIONS SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF MATTER DEPICTED HEREIN WITHOUT THE EXPRESSED WRITTEN PERMISSION OF THE CLAUDE LAVAL CORPORATION, OR ITS ASSIGNEES.

NOTES:


1. INLET & OUTLET FLANGES ARE 6" 150# RF PER ANSI B16.5 REQUIRING 8X ∅3/4" BOLTS (BOLTS AND GASKETS NOT INCLUDED).
2. MAXIMUM PRESSURE: 250 psi (17.24 bar).
3. MAXIMUM TEMPERATURE: 230°F (110°C).
4. PRESSURE LOSS: 5-18 psid (.34-1.24 bar) AT RATED FLOW.
5. RATED FLOW: 560-1030 gpm (127.2-233.9 m³/hr).
6. APPROXIMATE DRY WEIGHT: 1366 lbs (620 kg).
7. FINISH: LAKOS BLUE (EXTERIOR ONLY).


REVISIONS				
ECN	REV.	DESCRIPTION	DATE	APPROVED

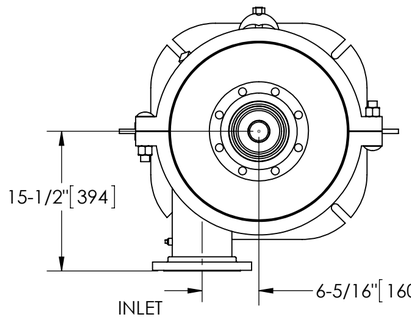

SUBMITTAL DRAWING


This drawing is submitted for spatial consideration only. Do not pre-plumb to these dimensions.

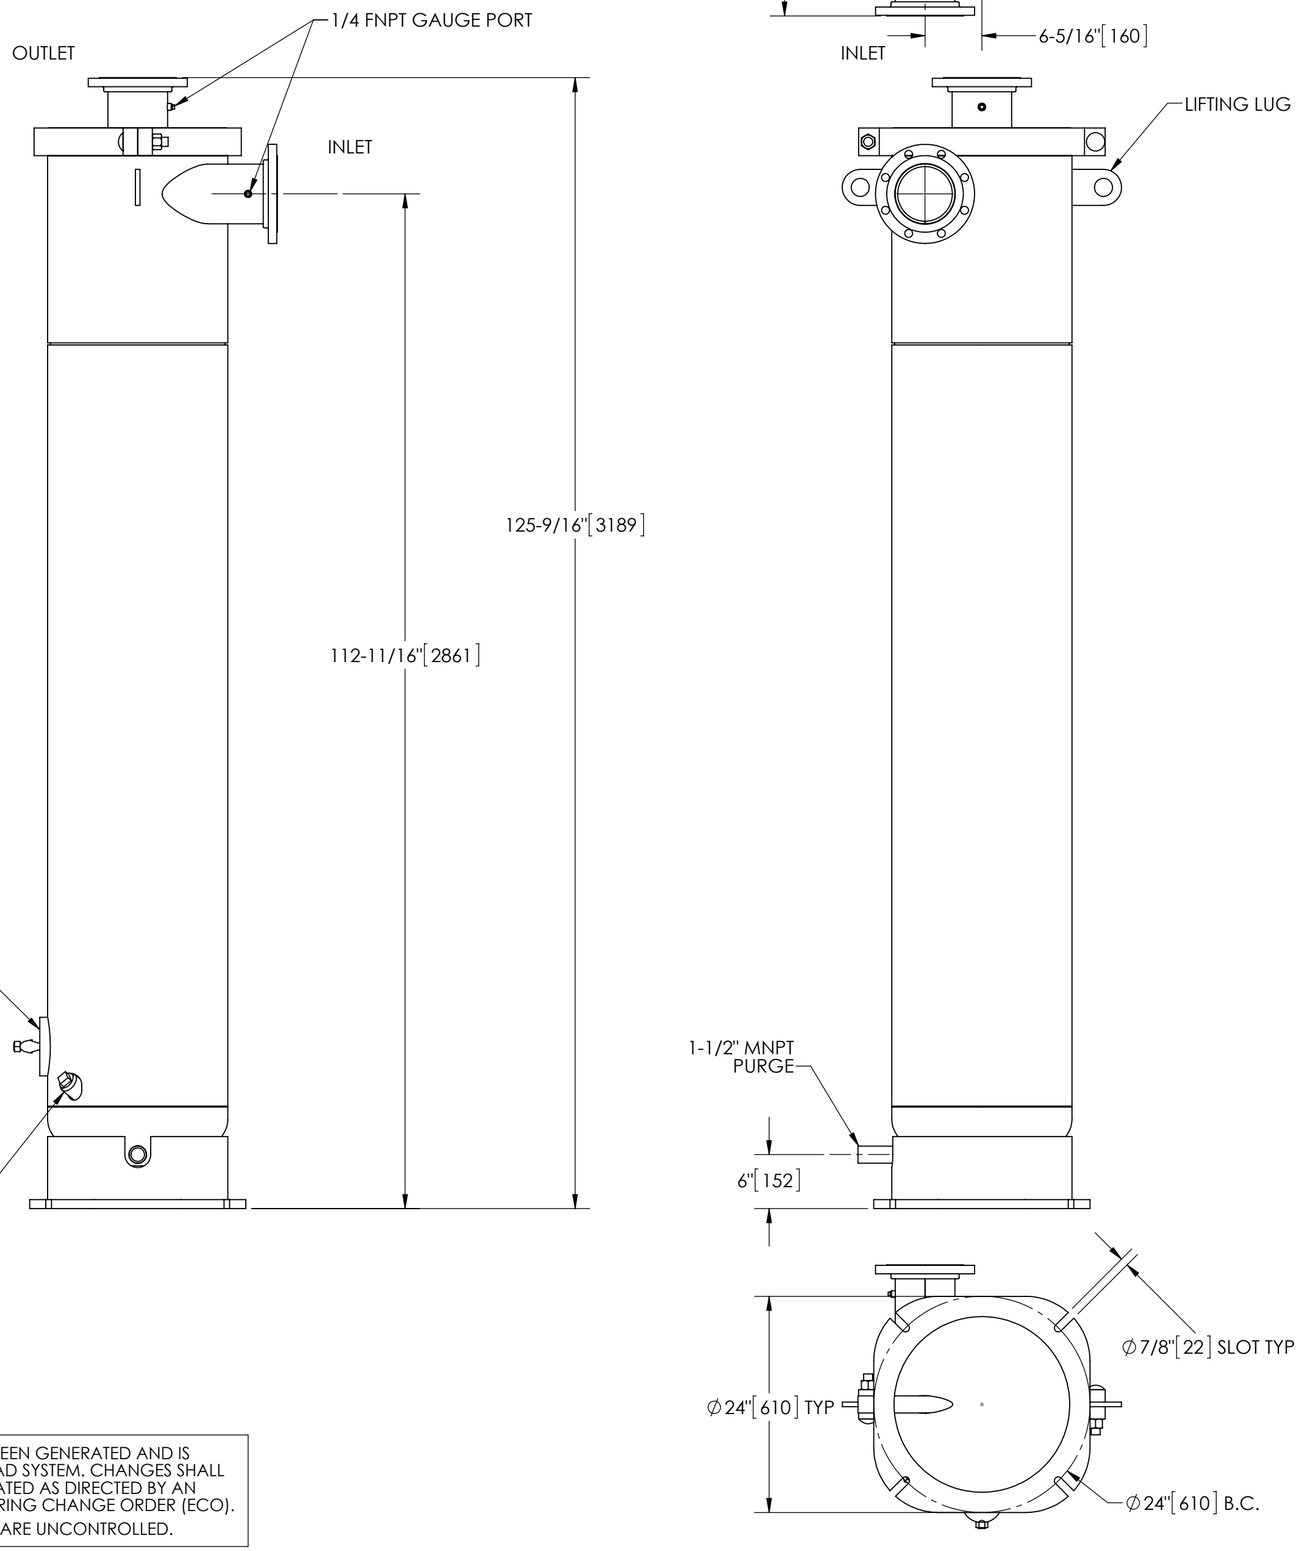

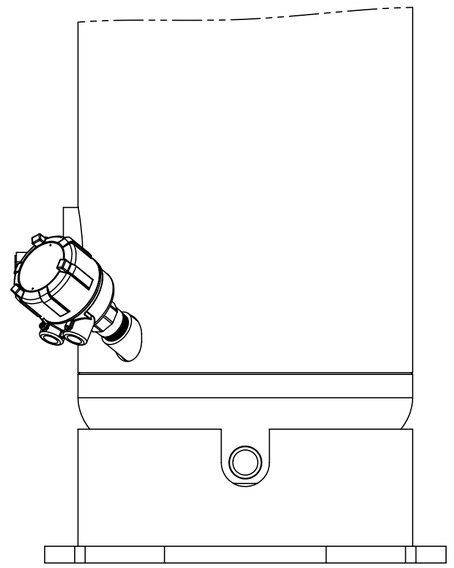

OPTIONAL SMART PURGE

UNIT SHOWN WITH OPTIONAL SMART PURGE SENSOR ASSEMBLY INSTALLED (ORDER SEPARATELY)



OPTIONAL FLANGED SPOOL

MODEL FS-06 (AVAILABLE SEPARATELY)
REQUIRED FOR REMOVAL OF TOP ASSEMBLY

THIS DRAWING HAS BEEN GENERATED AND IS MAINTAINED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY AN APPROVED ENGINEERING CHANGE ORDER (ECO).
PAPER COPIES ARE UNCONTROLLED.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN: INCHES [mm]
TOLERANCES ARE:
FRACTIONS ± 1/2" DECIMALS .XX ± .01 .XXX ± .005 .XXXX ± .0005 ANGLES ± 1/4°
DO NOT SCALE DRAWING
MATERIAL: CLASS P-1 MILD CARBON STEEL
FINISH: LAKOS BLUE

ENGINEERED FOR: STANDARD

APPROVALS	DATE
DRAWN: Cag	10/3/14
ENGR: -	-
MFG: -	-
WORK ORDER	QTY.

LAKOS®
CLAUDE LAVAL CORP.
FRESNO, CALIFORNIA 93727
WWW.LAKOS.COM

TITLE: eJPX-0560-V, SEPARATOR
0560 eJPX VERTICAL, CARBON STEEL

SIZE	MODEL NO.	DWG NO.	REV.
C		137169	01
SCALE 1:14		EST. WT. 1366 lb	SHEET 1 OF 1

DWG NO. 137169 SH 1 REV. 01

Distribution et conseil : GEDO FRANCE
04 85 88 02 75 | separateur@gedo.fr | separateurs.gedo.fr
565 avenue du Prado - 13008 Marseille - France