

EXCEPT AS OTHERWISE PROVIDED BY CONTRACT, THIS DRAWING AND SPECIFICATIONS SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF MATTER DEPICTED HEREIN WITHOUT THE EXPRESSED WRITTEN PERMISSION OF THE CLAUDE LAVAL CORPORATION, OR ITS ASSIGNEES.

NOTES:

1. INLET & OUTLET FLANGES ARE 2" 150# RF PER ANSI B16.5 REQUIRING 4X ∅5/8" BOLTS. (BOLTS AND GASKETS NOT INCLUDED)
2. MAXIMUM PRESSURE: 250 psi (17.24 bar).
3. MAXIMUM TEMPERATURE: 230°F (110°C).
4. PRESSURE LOSS: 5-18 psid (.34-1.24 bar) AT RATED FLOW.
5. RATED FLOW: 80-150 gpm (18.2-34.0 m³/hr).
6. APPROXIMATE DRY WEIGHT: 228 lb (101 kg).
7. FINISH: LAKOS BLUE (EXTERIOR ONLY).


REVISION HISTORY				
ZONE	REV	DESCRIPTION	DATE	APPROVED

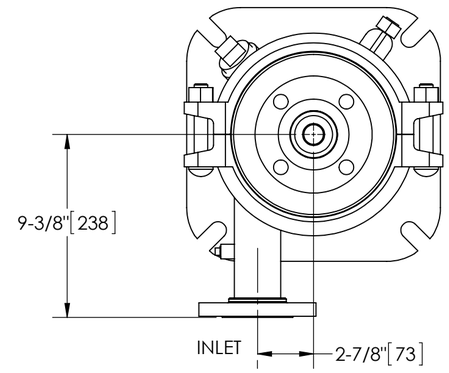

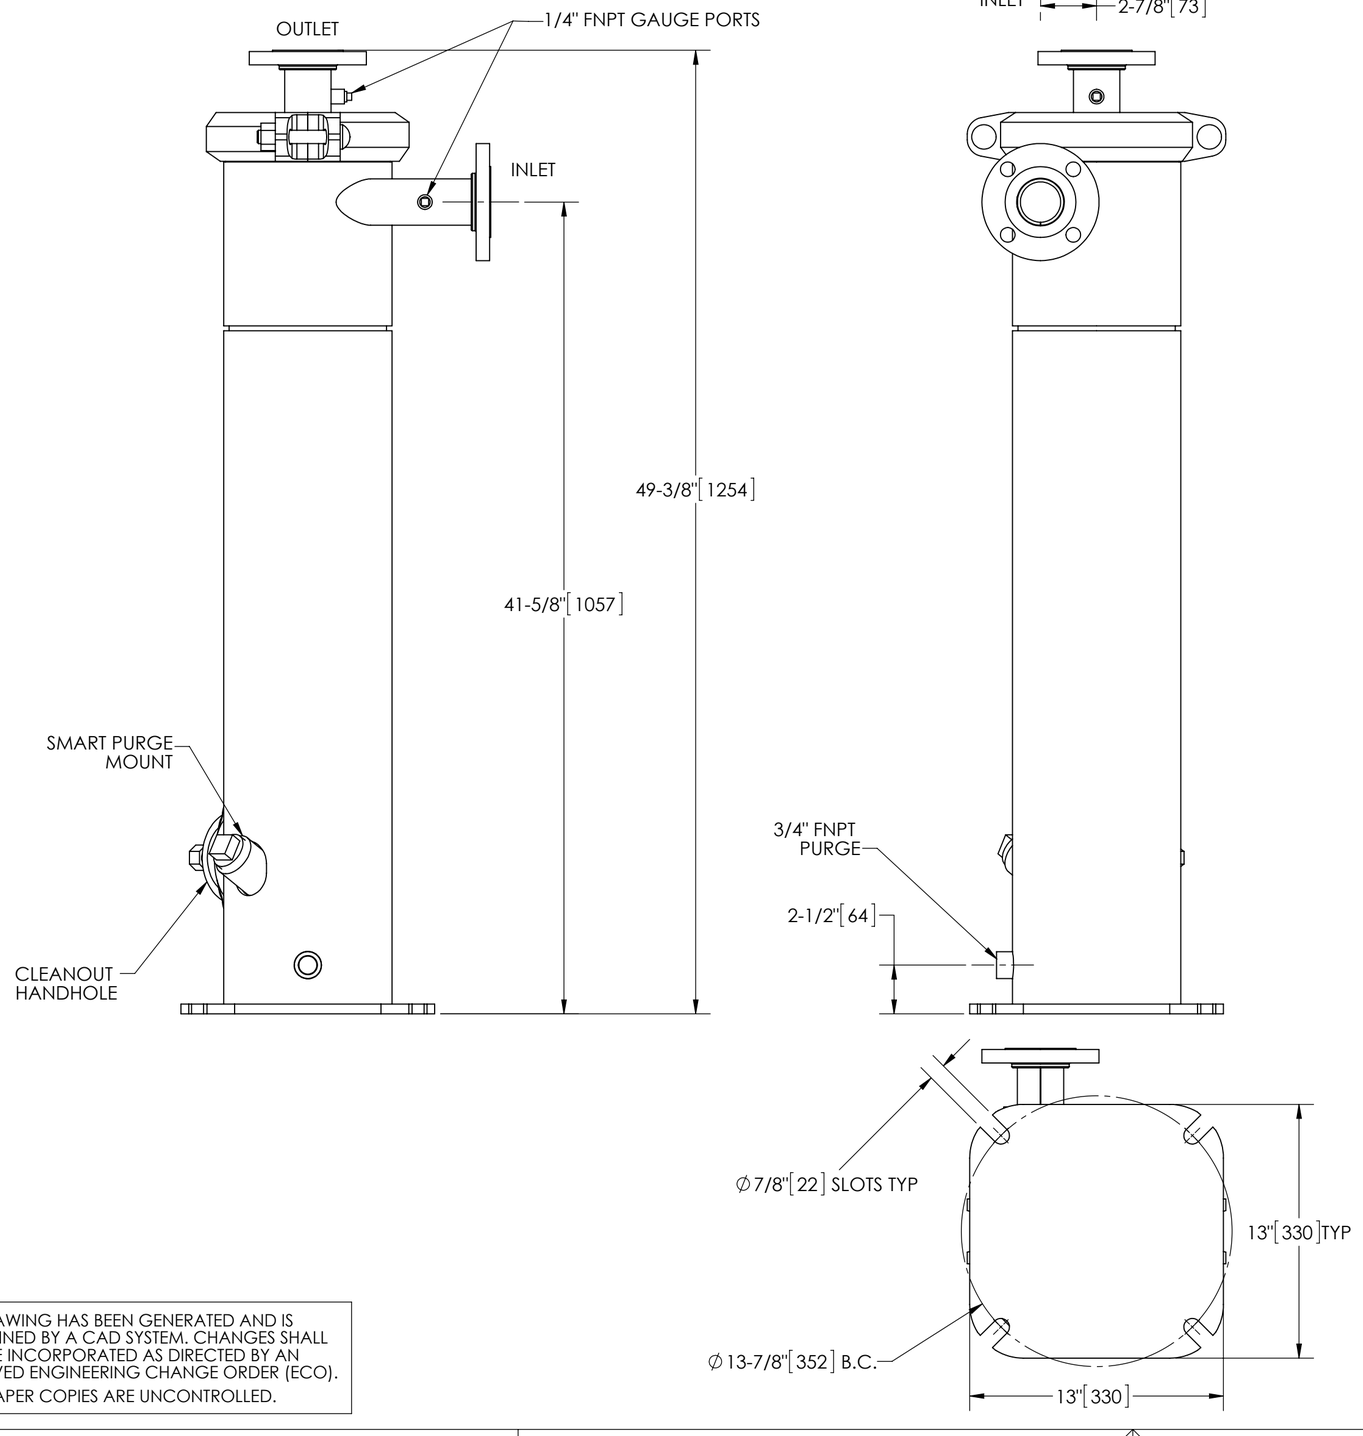


SUBMITTAL DRAWING

This drawing is submitted for spatial consideration only. Do not pre-plumb to these dimensions.

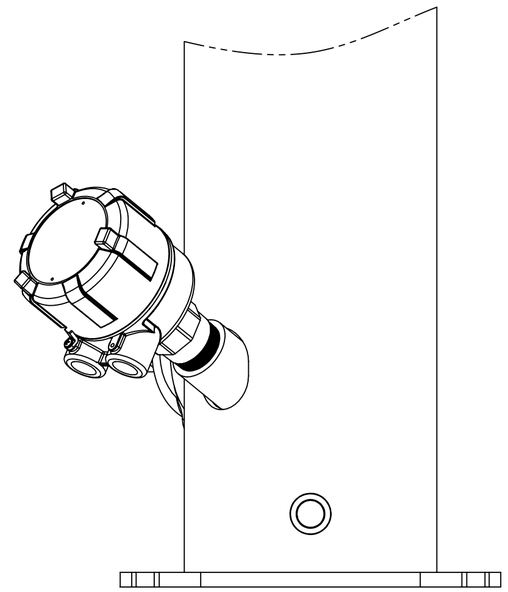

OPTIONAL SMART PURGE

UNIT SHOWN WITH OPTIONAL SMART PURGE ASSEMBLY INSTALLED (ORDER SEPARATELY)

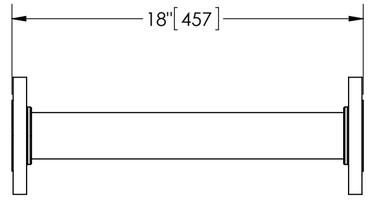

OPTIONAL FLANGED SPOOL

MODEL FS-02 (AVAILABLE SEPARATELY)
REQUIRED FOR REMOVAL OF TOP ASSEMBLY

THIS DRAWING HAS BEEN GENERATED AND IS MAINTAINED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY AN APPROVED ENGINEERING CHANGE ORDER (ECO).
PAPER COPIES ARE UNCONTROLLED.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN: INCHES [mm]
TOLERANCES ARE:
FRACTIONS ± 1/2" DECIMALS .XX ± .01 .XXX ± .005 .XXXX ± .0005 ANGLES ± 1/4°
DO NOT SCALE DRAWING

MATERIAL: CLASS P-1 MILD CARBON STEEL

FINISH: LAKOS BLUE

ENGINEERED FOR: STANDARD

APPROVALS	DATE
DRAWN Cag	9/30/14
ENGR -	-
MFG -	-
WORK ORDER	QTY.

CLAUDE LAVAL CORP.
FRESNO, CALIFORNIA 93727
WWW.LAKOS.COM

TITLE: eJPX-0080-V, SEPARATOR
0080 eJPX VERTICAL, CARBON STEEL

SIZE	MODEL NO.	DWG NO.	REV.
C		137160	01

SCALE 1:6 | EST. WT. 228 lb | SHEET 1 OF 1

DWG NO. 137160 SH REV. 01

GEDO
Distribution et conseil : GEDO FRANCE
04 85 88 02 75 | separateur@gedo.fr | separateurs.gedo.fr
565 avenue du Prado - 13008 Marseille - France